



**WATER MANAGEMENT  
DRAINAGE WRAP SYSTEM  
SUGGESTED DETAILS**

## **Energex® Wall Systems**

### **NOTICE**

The suggested details which follow, also any related notes and/or text contained thereon are based upon typical requirements of ENERGEX® Wall Systems exterior insulation and finish systems. These are published strictly as a guide for architectural and construction industry professionals in order to illustrate typical and/or general design conditions.

Do not use these details by themselves. These details do not constitute design instructions for exterior insulation and finish applications. Use these details in conjunction with ENERGEX® Wall Systems current product specifications, product data sheets and application instructions.

Any details described are strictly for the purpose of illustrating typical system applications. Any other materials shown in any details are included only for the clarity of the system detail. These are incidental to the details. Please consult with the manufacturer s and/or suppliers of any separate material for their product specifications and application instructions. When site and/or design conditions not shown in these details are present, or if any unusual design is involved, and for a list of compatible sealant s, please consult with ENERGEX® Wall Systems technical support for assistance.

Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

## CAUTION AND DISCLAIMER

The following information should be obvious to design professionals, contractors, builders, installers, purchasers and users of Energex® materials but please take a moment to review this information and to take an opportunity to remember the importance of sound design and construction practices, methods and materials.

**Energex® materials are components of construction assemblies and are not consumer products. Serious damage to Energex® materials and to the buildings and building components and assemblies into which they are incorporated can result from**

- (1) improper use, application or installation,
  - (2) use as part of improperly designed or constructed assemblies or buildings or with defective adjacent materials or assemblies,
  - (3) failure to follow applicable specifications, instructions and construction details, or
  - (4) other design or construction defects, deficiencies and failures. Any resulting accumulation of water and moisture in wall assemblies may cause damage to building components including delamination of wall coverings
- Incorporating Energex® materials, deterioration of internal wall components and mold.

Energex® sells its materials “as is” and disclaims all liability and warranties express or implied except for explicit limited written warranties issued to building owners in accordance with Energex® approved warranty program offerings from time to time. Energex® undertakes no responsibility for the quality of its materials except as otherwise provided in its approved warranty program offerings. Energex® assumes no responsibility that its materials will be fit for any particular purpose, except as otherwise provided in Energex® approved warranty program. Energex® will not be liable for any direct, incidental, consequential, or indirect damages (including lost profits) arising out of use of its materials.

Please note that some jurisdictions may not allow the exclusion of implied warranties, so some of the above exclusions may not apply to you. Energex® component materials are intended for application by qualified installers as specified by qualified design professionals. Energex® component materials should be installed in accordance with written specifications, instructions, details and applicable code organization evaluation reports under supervision of qualified builders, general contractors, design professionals or independent inspectors. Please see the relevant guide. Although every effort is made to ensure that the information is timely and correct, it is provided solely as a guide to assist the designer, specifier, builder, general contractor and/or installer. The responsibility remains with the designer, specifier, builder, general contractor and/or installer to apply the information provided by Energex® properly to specific installations. Energex® component materials should be installed only using suitable design and construction methods and with non-defective properly installed and constructed adjacent materials and assemblies.

Performance of the completed building components into which Energex® component materials have been installed should be verified by testing and inspection as appropriate, carried out only by qualified persons. It is the user responsibility and obligation to provide for such inspection and testing. Energex® component materials are not designed or intended to be able to correct or prevent damage from faulty design or workmanship such as the absence or improper integration of flashing, nor are they designed or intended to correct or prevent damage from other defective components of construction that leak anywhere into the wall assembly. Flashing should always be integrated with the cladding to direct water to the exterior, not into the wall assembly, particularly at potential leak sources. The design/construction professional must take material compatibility and construction sequencing into account when designing a building exterior. Flashings, windows, roofs, doors and other building penetration and termination locations and adjacent materials should be fully evaluated, properly selected and constructed to prevent water entry into building assemblies. The accumulation of moisture behind Energex® component materials may result in building damage. Qualified design and construction professionals should strictly comply with specified procedures for mixing, application and integration to avoid causing or contributing to potential water intrusion problems.

**Energex® disclaims, and assumes no liability for on-site inspections, for improper application, assembly, installation or use of Energex® materials or any assemblies into which they are incorporated, for incorporation as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, for all on-site construction activities (being beyond Energex® control), or for any damage including water or moisture intrusion or delamination resulting in whole or in part because of any such occurrences.**

Before use, design professionals, owners and contractors should fully investigate Energex® materials and assemblies into which they are to be incorporated to enable informed choices as to suitability for a particular project and proper design and implementation.

**Purchasers of Energex® component materials should share this Caution and Disclaimer information with purchasers or owners of buildings into which Energex® materials are incorporated.**

Copyright 2009, Energex LLC

Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

# Table of Contents

## GENERAL CONSTRUCTION

SYSTEMCOMPONENTS.....	5
FRAMED WALL.....	6
ROUGH WINDOW FLASHING .....	7-8
INSIDE CORNER.....	9
OUTSIDE CORNER.....	10

## EXPANSION JOINTS

EXPANSION JOINT.....	11
INSIDE CORNER/DISSIMILAR SUBSTRATES .....	12
THRU-SYSTEM FLASHING WITH WEEPS .....	13

## TERMINATIONS

ABOVE PAVEMENT .....	14
ABOVE GRADE.....	15
VERTICAL.....	16
BALCONY DECK.....	17

## WINDOWS

HEAD ASSEMBLY (WINDOWS,DOORS,LOUVERS, ETC.) .....	18
HEAD TERMINATION.....	19
BACK WRAPPED JAMB.....	20
BACKWRAPPED SILL.....	21

## ROOF LINE

TERMINATION AT SOLID SOFFIT .....	22
TERMINATION AT INSULATED SOFFIT .....	23
CORNICE MEETS SYSTEM WALL .....	24-25
PARAPET.....	26
HIGH WALL AT LOW ROOF.....	27

## PENETRATIONS


HOSE BIB.....	28
SMALL ELECTRICAL FIXTURE .....	29
FIXTURE ATTACHMENT.....	30
SCUPPER.....	31
TERMINATION AT APPLIANCE.....	32

## AESTHETICS

GROOVE/REVEAL.....	33
SMALL BAND/PROJECTION.....	34


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

SYSTEM COMPONENTS

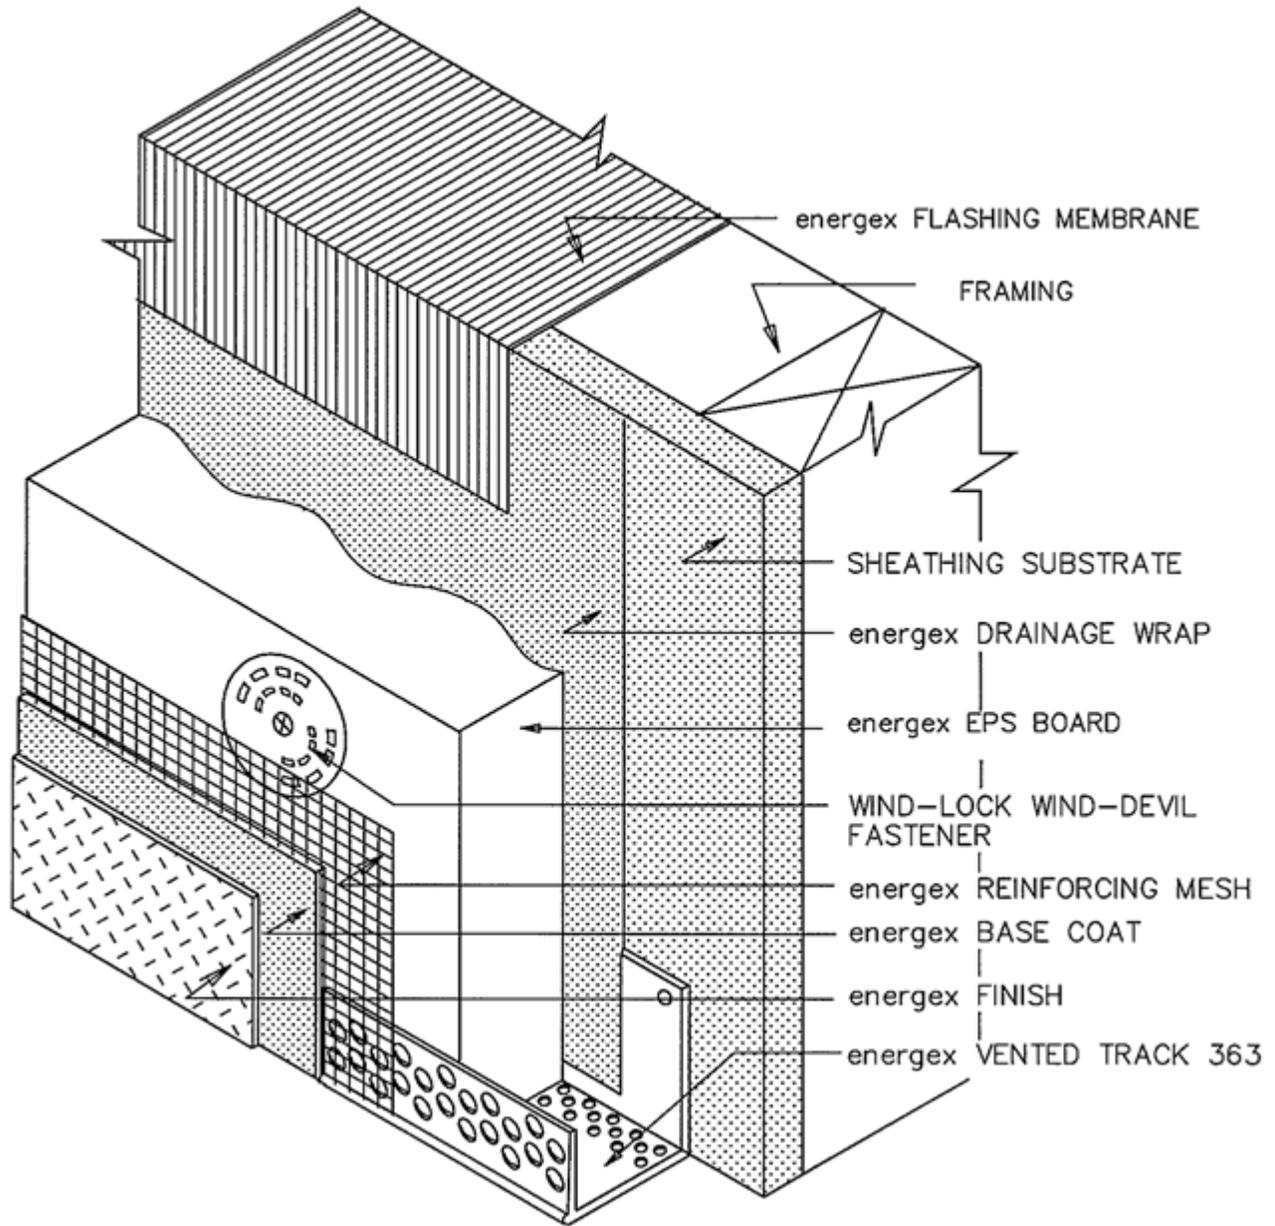


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

FRAMED WALL

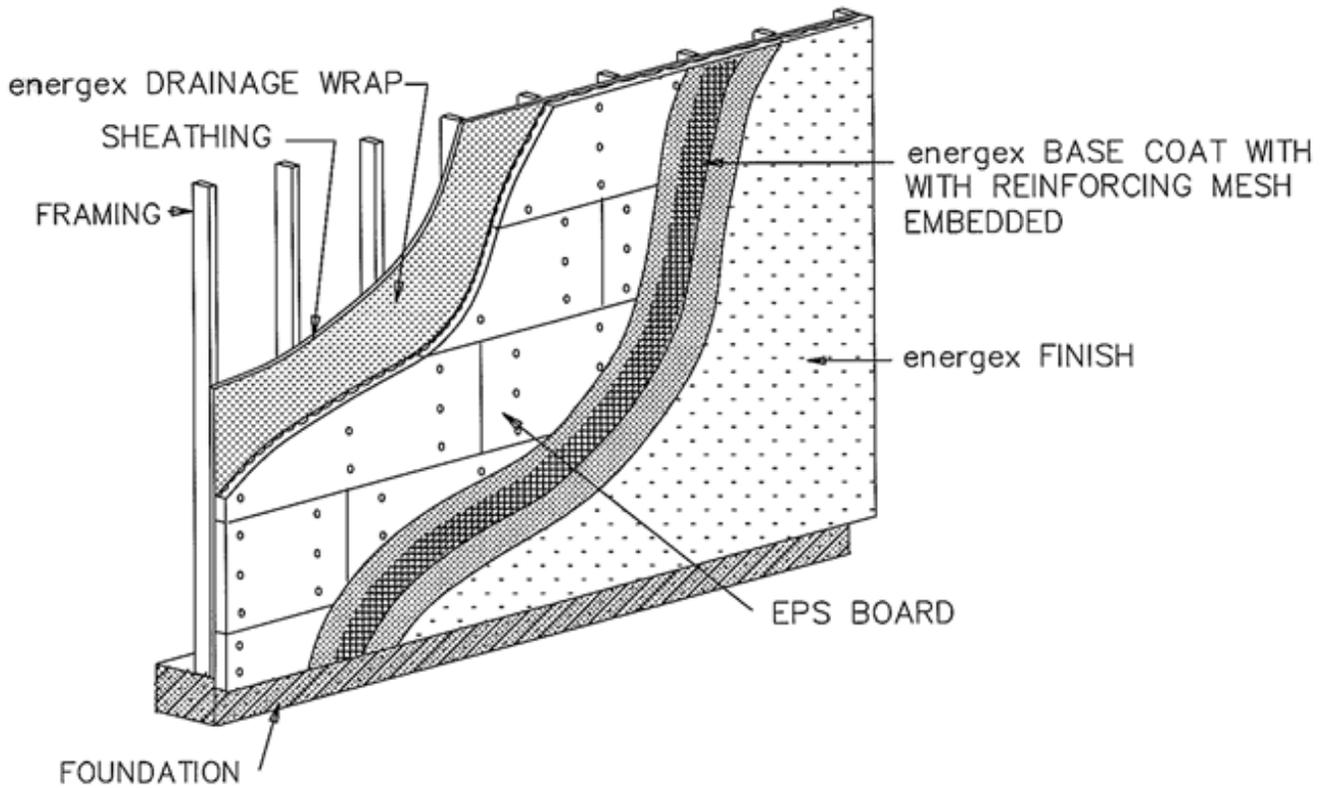


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

**ROUGH WINDOW FLASHING – PART 1**

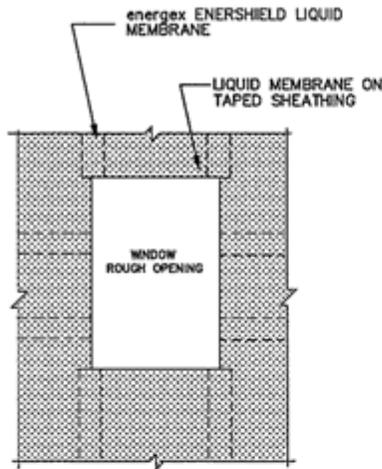

**STEP 1**

Embed energex Sheathing Tape into energex wet Enershield Liquid Membrane over sheathing board joints. After the sheathing tape has been embedded, apply the Enershield Liquid Membrane to an area of 12" (305 mm) around the rough window opening, and allow to dry.

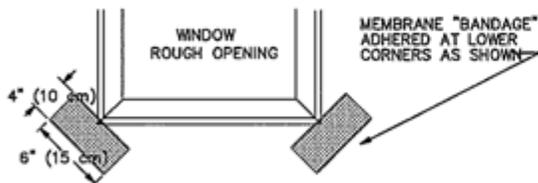


**INSTALLING MEMBRANE "BANDAGES"**

**STEP 2**

Cut "bandages" to approximate size indicated

Peel protective backer from membrane and install diagonally at sill corners as shown extending approximately 1/4" (6 mm) into opening. Push bandage membrane into corner of rough opening. Enershield must not be visible at the corners of the rough opening.

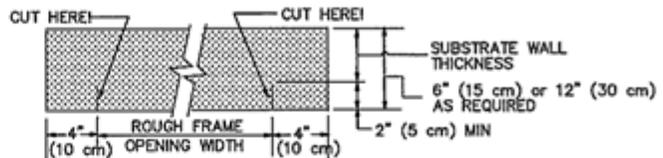


**CUTTING FLASHING MEMBRANE**

**STEP 3**

Cut a piece of energex Flashing Membrane 8" (20 cm) longer than the rough opening width. Make 2 small cuts through the membrane as shown.


NOTE: Select flashing membrane width 6" (15 cm) or 12" (30 cm) at least 2" (5 cm) wider than thickness of substrate wall.

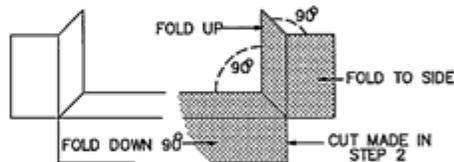

**FOLDING FLASHING MEMBRANE**

**STEP 4**

Fold membrane to conform with rough opening. Peel protective backer from membrane to expose adhesive.

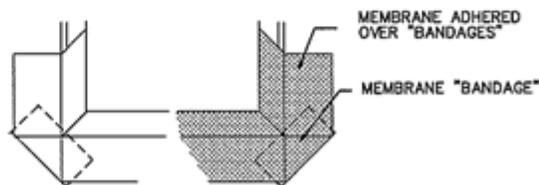


**INSTALLING THE FLASHING MEMBRANE**

**STEP 5**


Install the "self sticking" membrane at the rough opening. Membrane should lap over the previously installed "bandages".

Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

ROUGH WINDOW FLASHING – PART 2

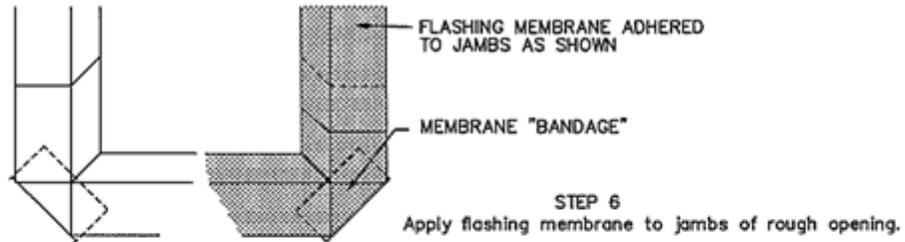


INSTALLING THE FLASHING MEMBRANE AT JAMBS

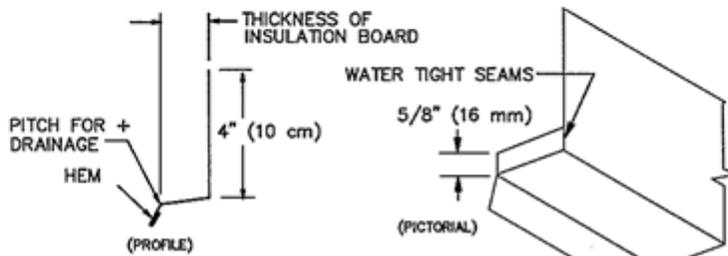


METAL FLASHING PROFILE

Flashing should be fabricated in the profile shown. Length of flashing is 1" longer than the width of the window frame. End dams should be turned upward 5/8" (16 mm) as shown.

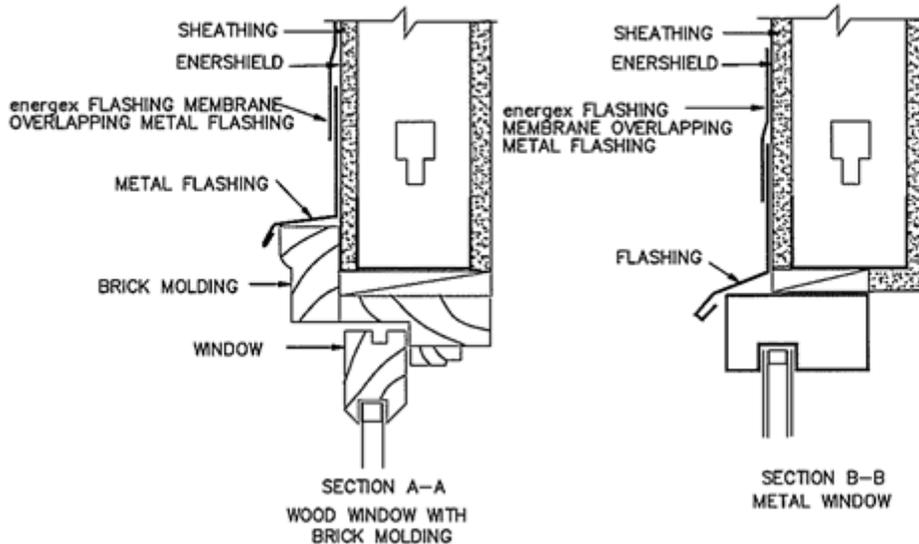


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

INSIDE CORNER

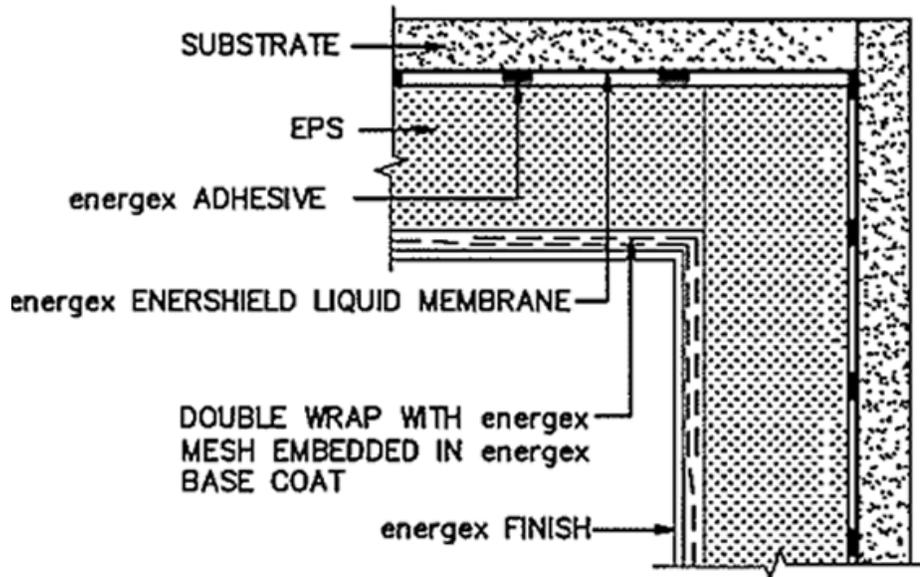


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

OUTSIDE CORNER

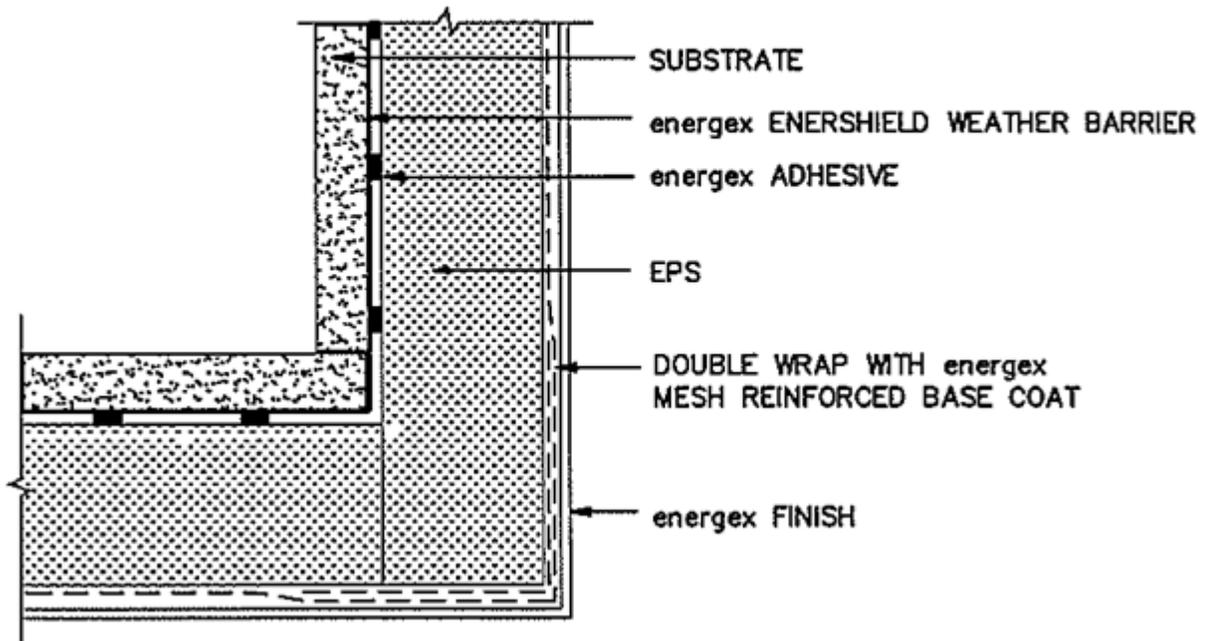


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

EXPANSION JOINT

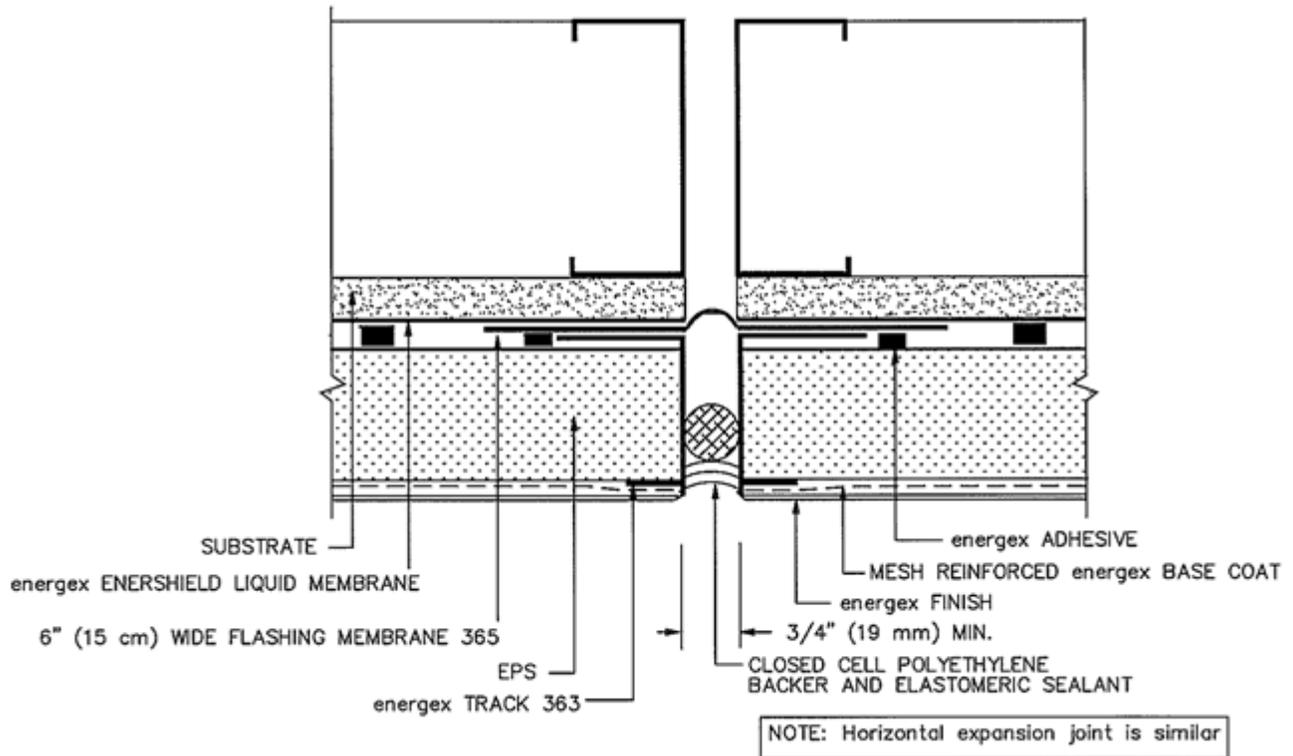


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

INSIDE CORNER/ DISSIMILAR SUBSTRATES

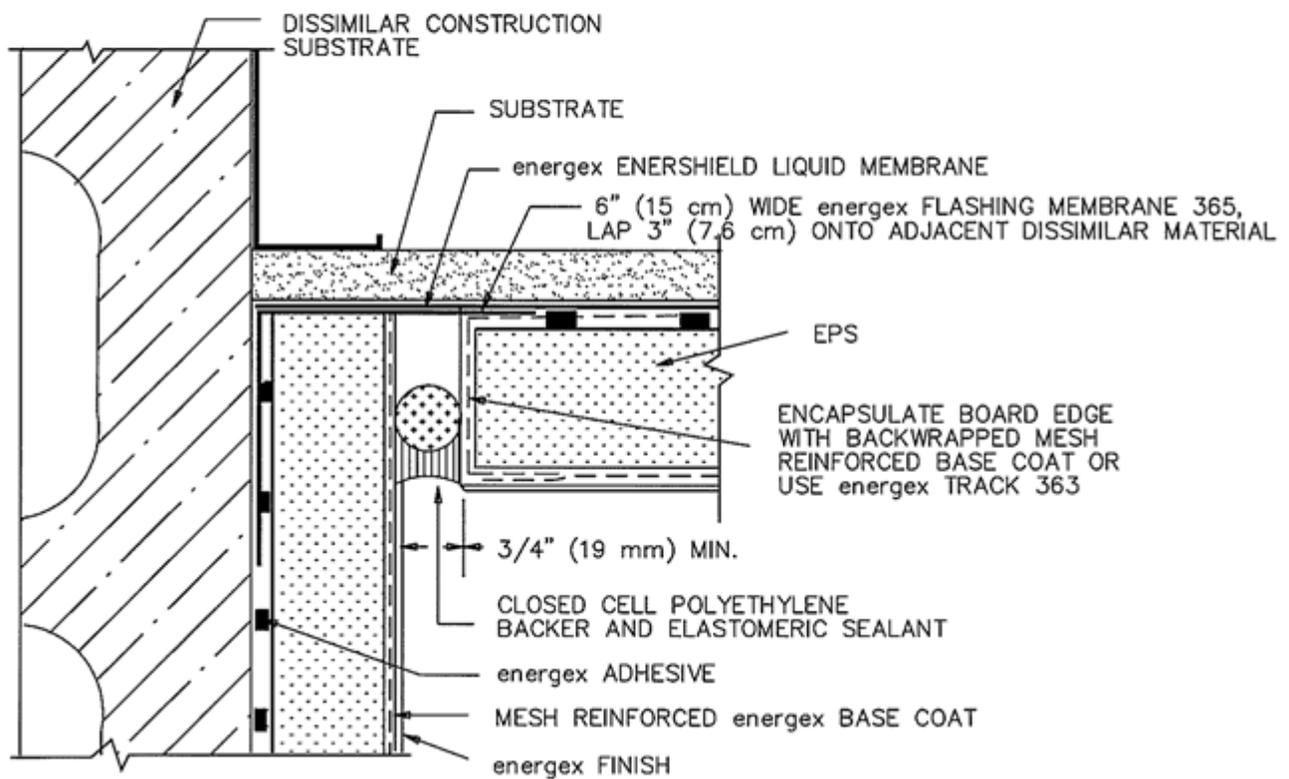


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

THRU-SYSTEM FLASHING WITH WEEPS

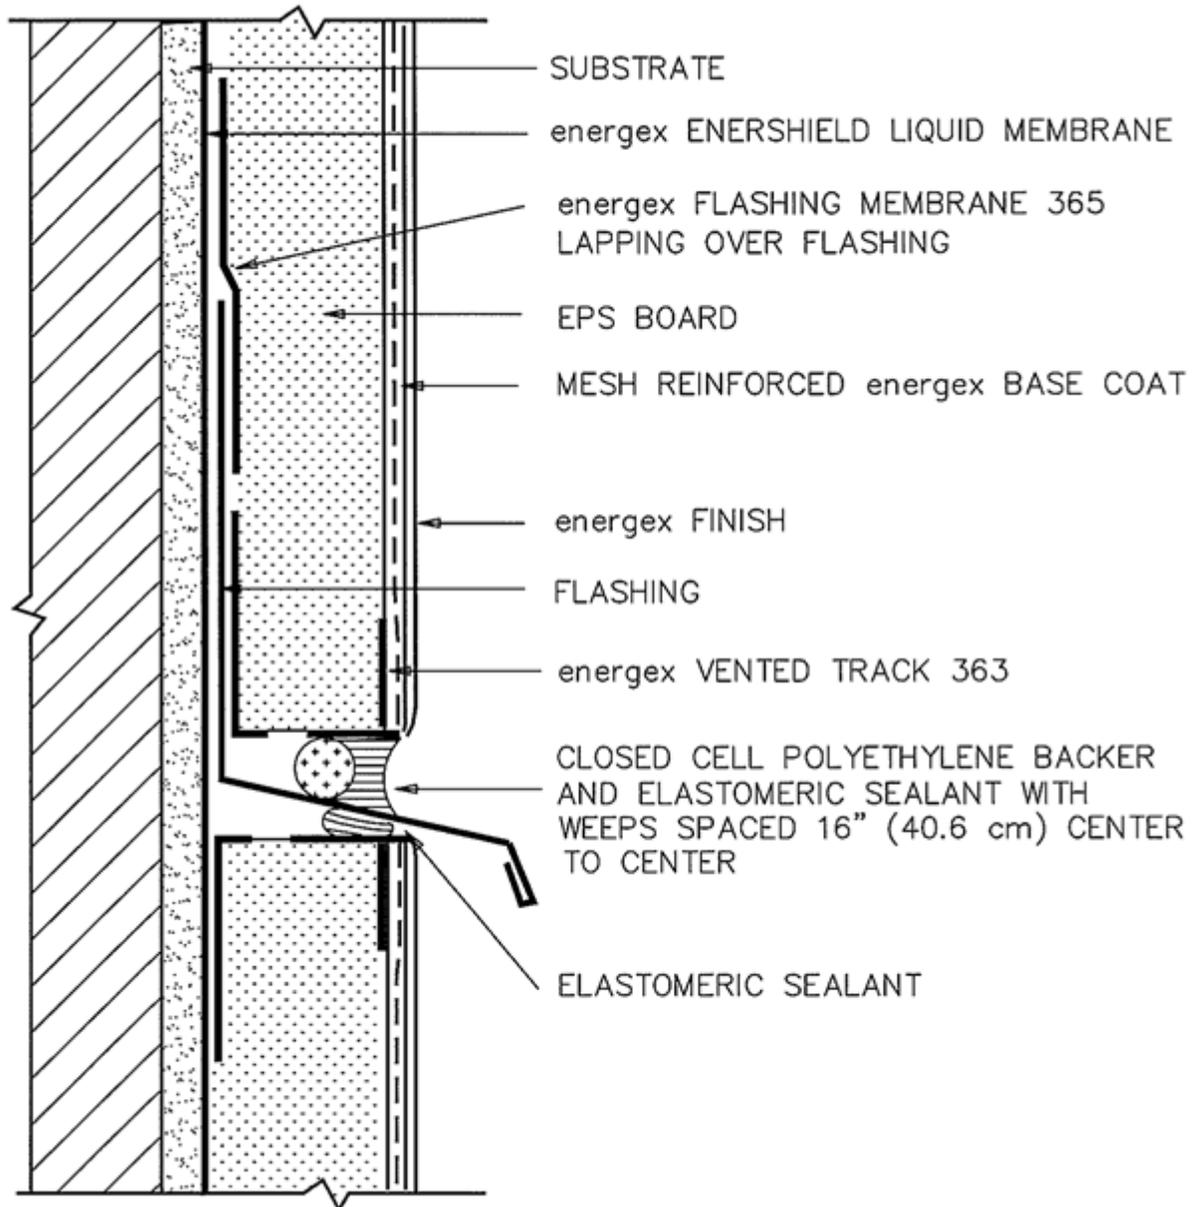


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION ABOVE PAVEMENT

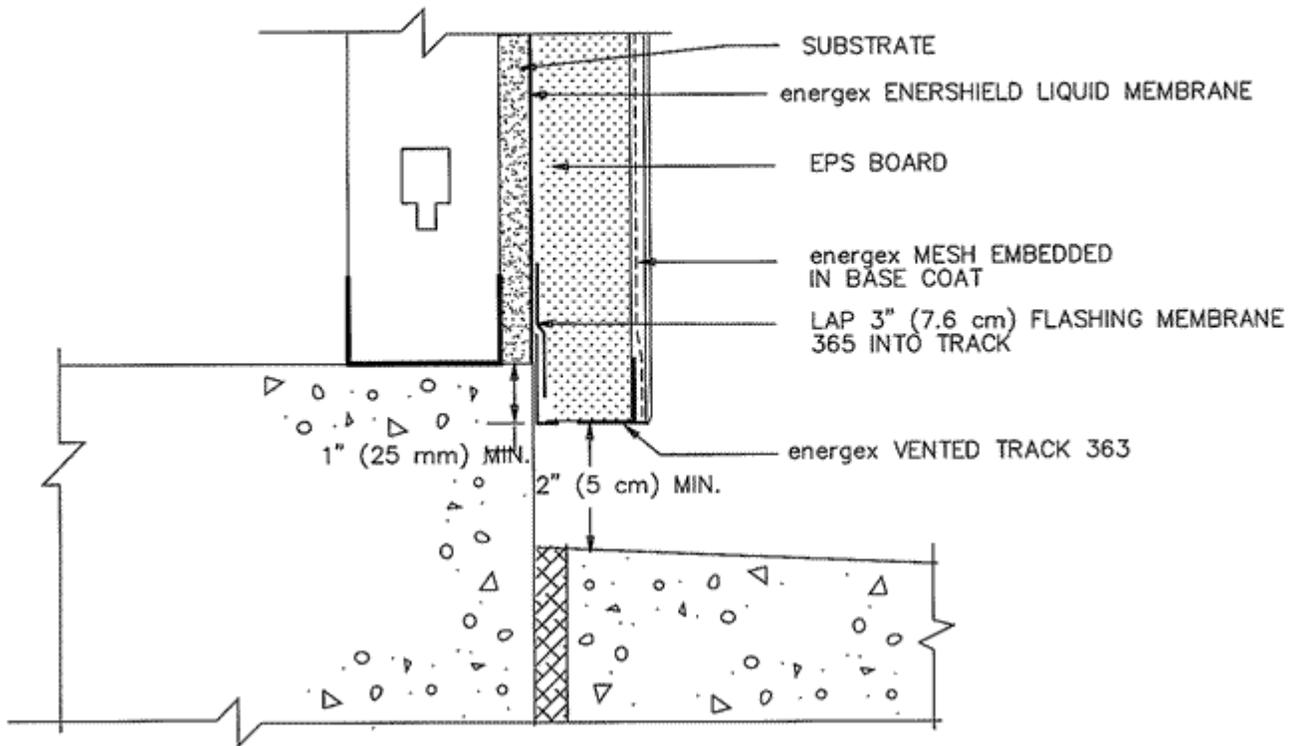


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION ABOVE GRADE

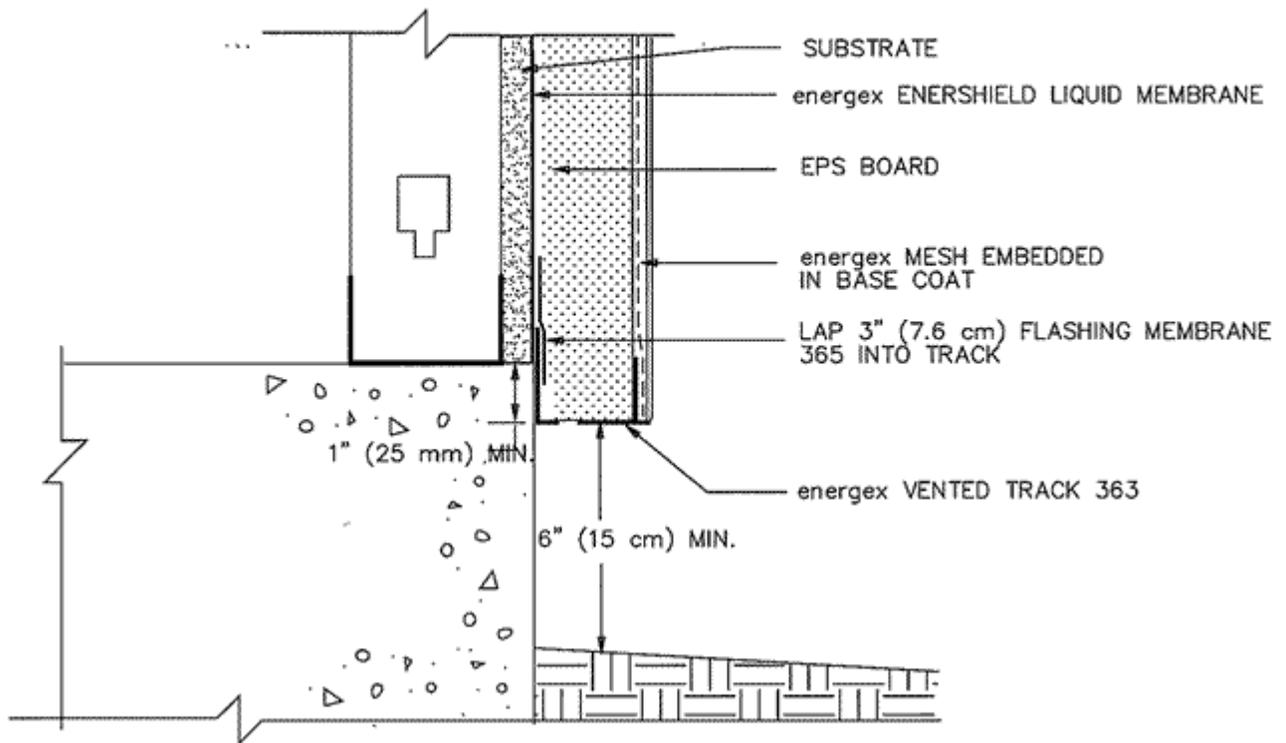


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION AT VERTICAL EDGE

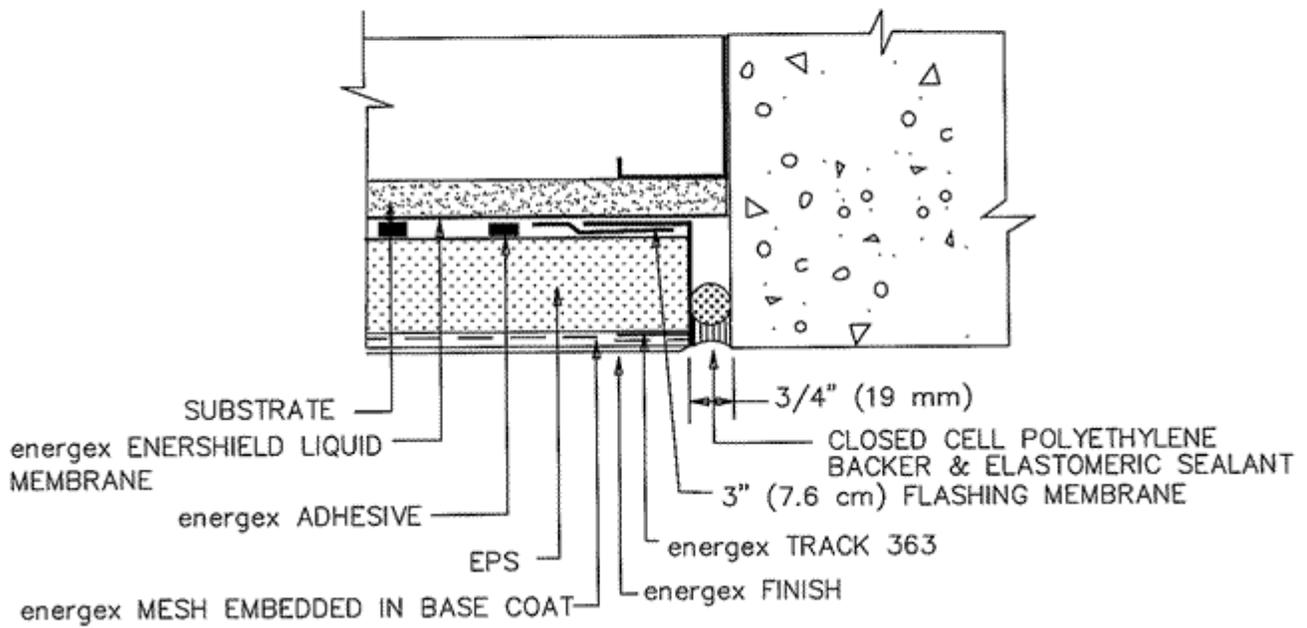


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION AT BALCONY DECK

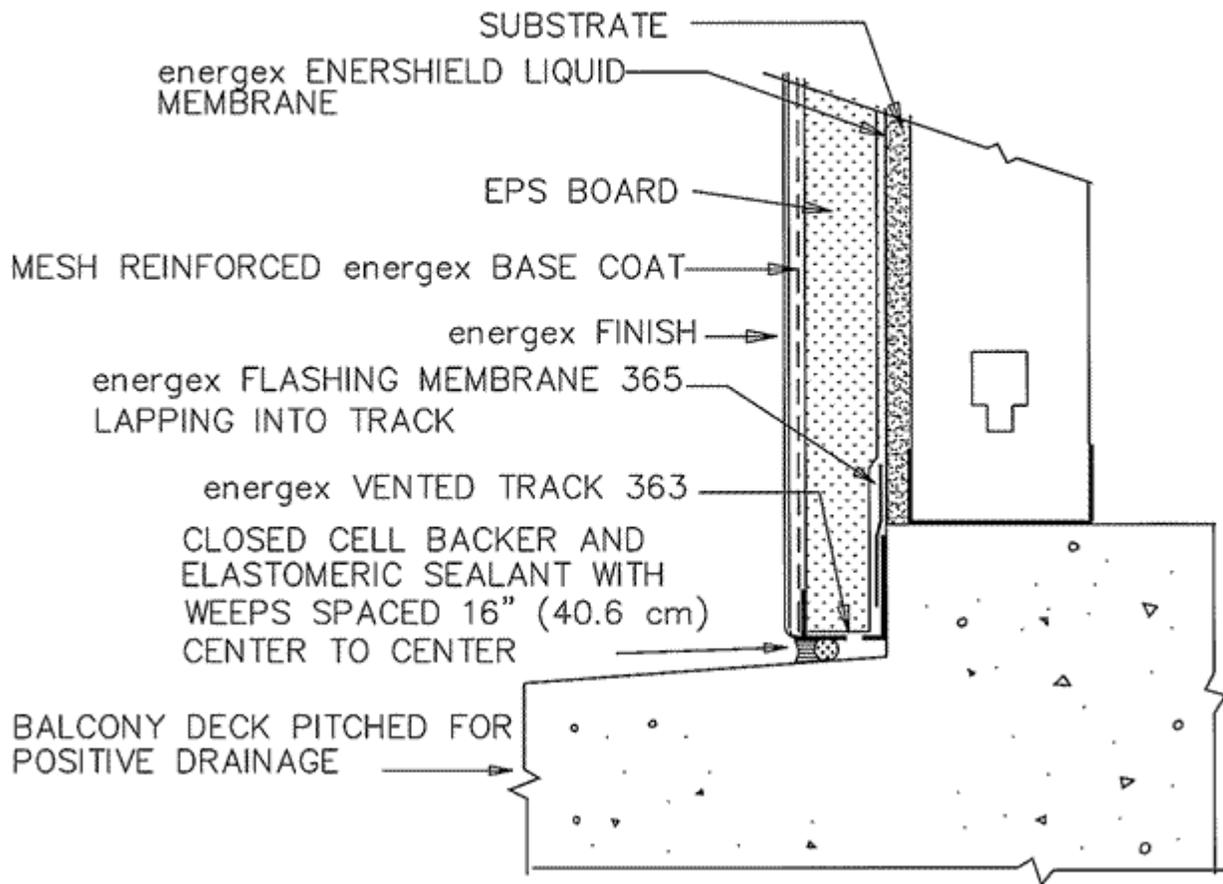


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

HEAD ASSEMBLY(WINDOWS, DOORS, LOUVERS, ET AL.)

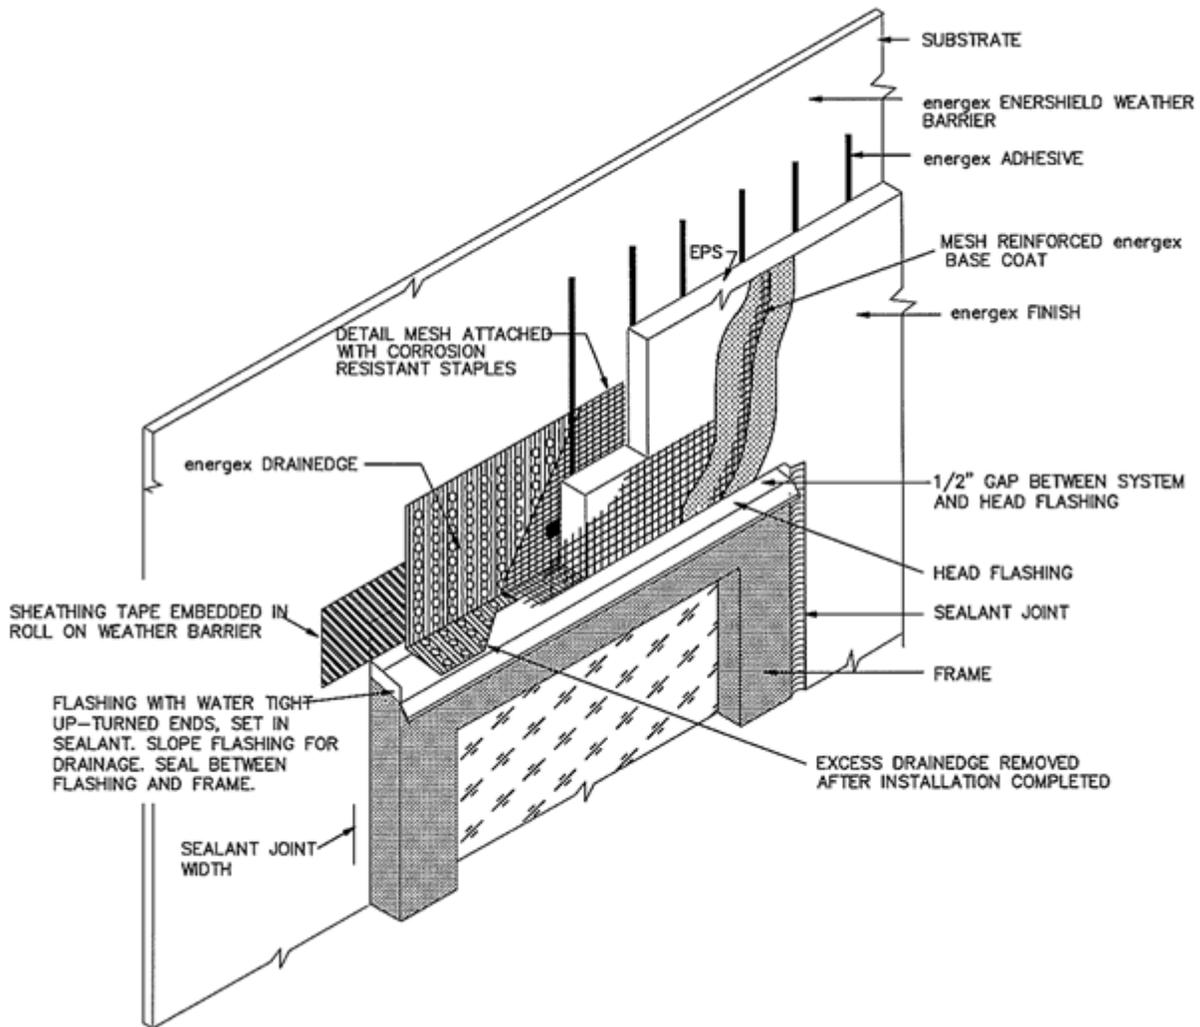


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

HEAD TERMINATION

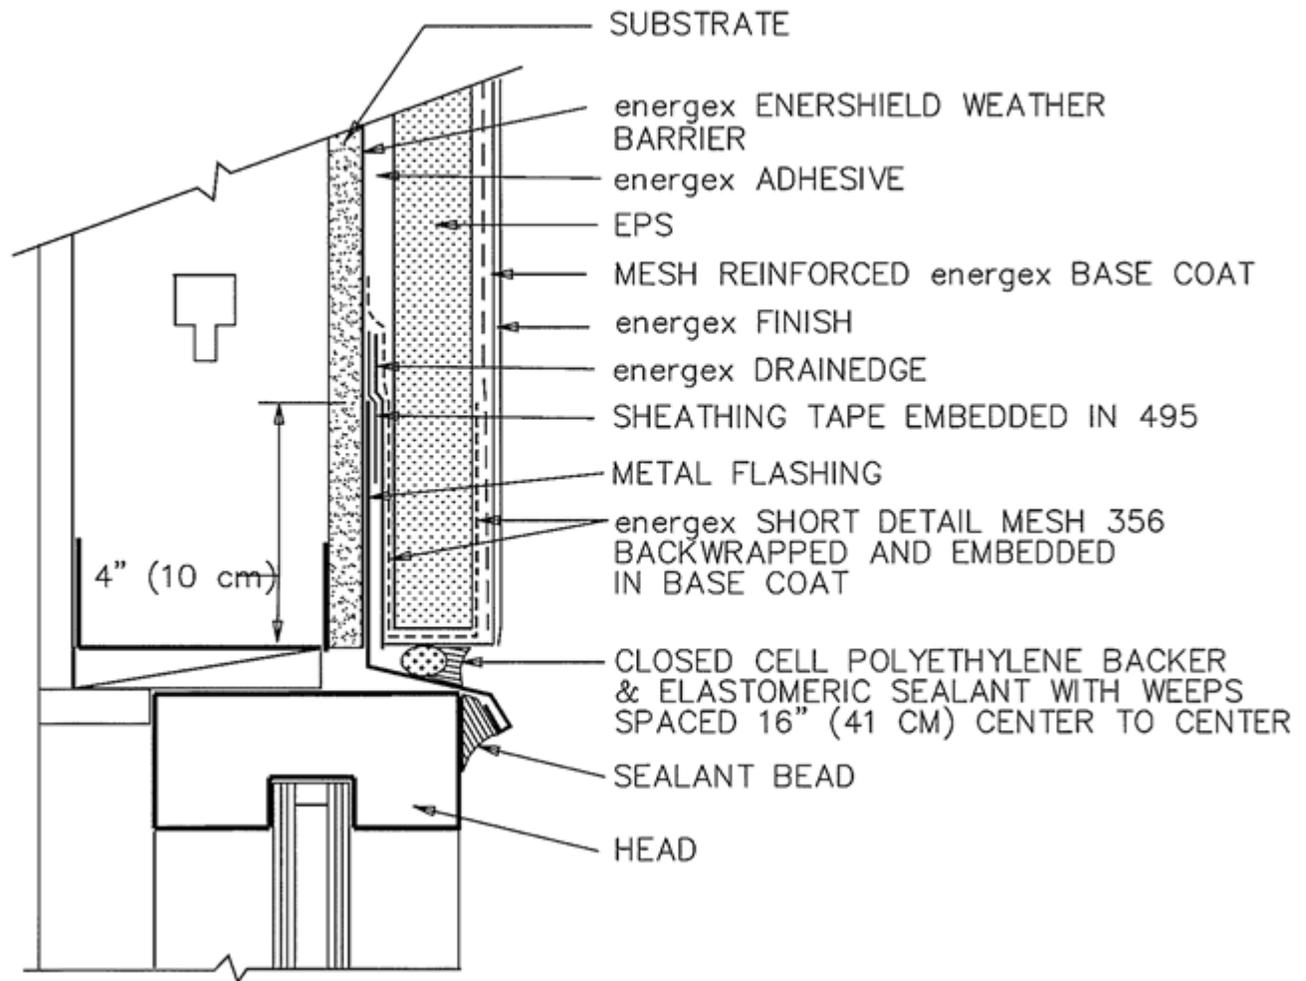


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

BACK WRAPPED JAMB

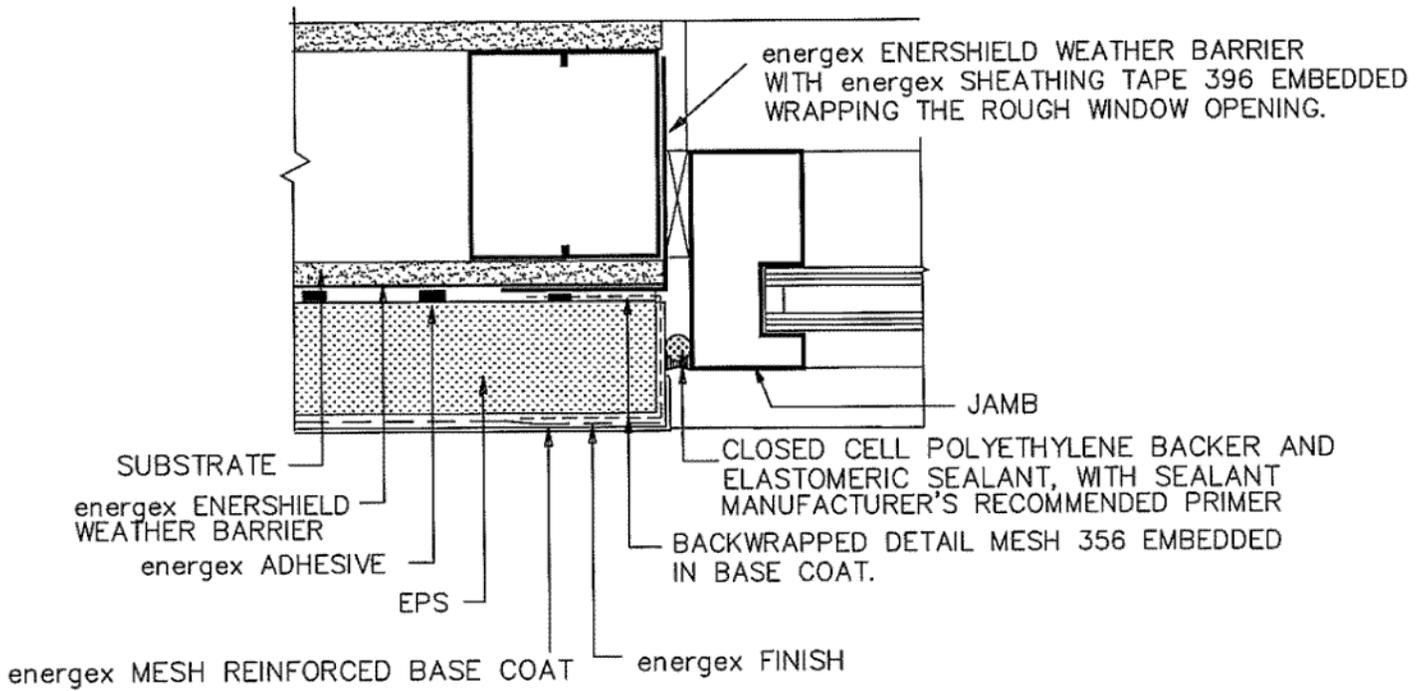


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

BACK WRAPPED SILL

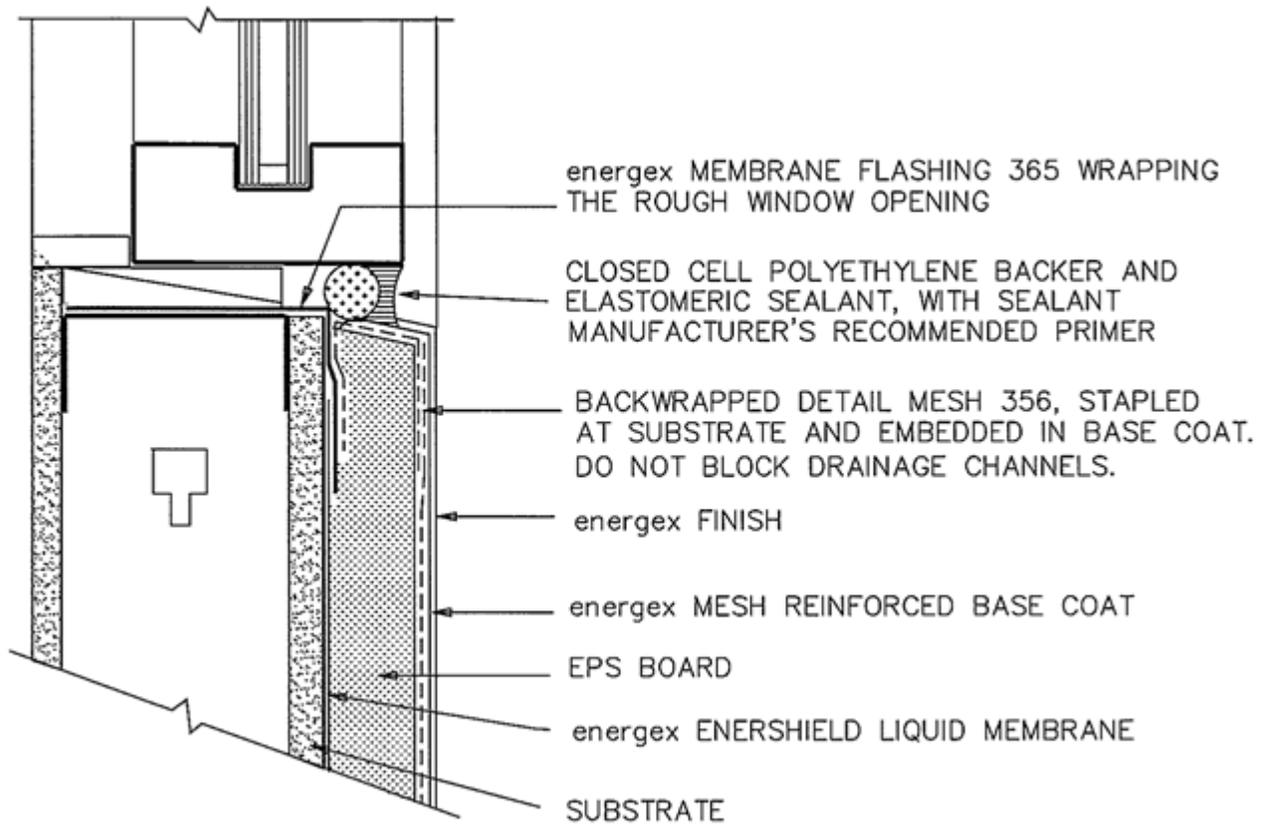


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION AT SOLID SOFFIT

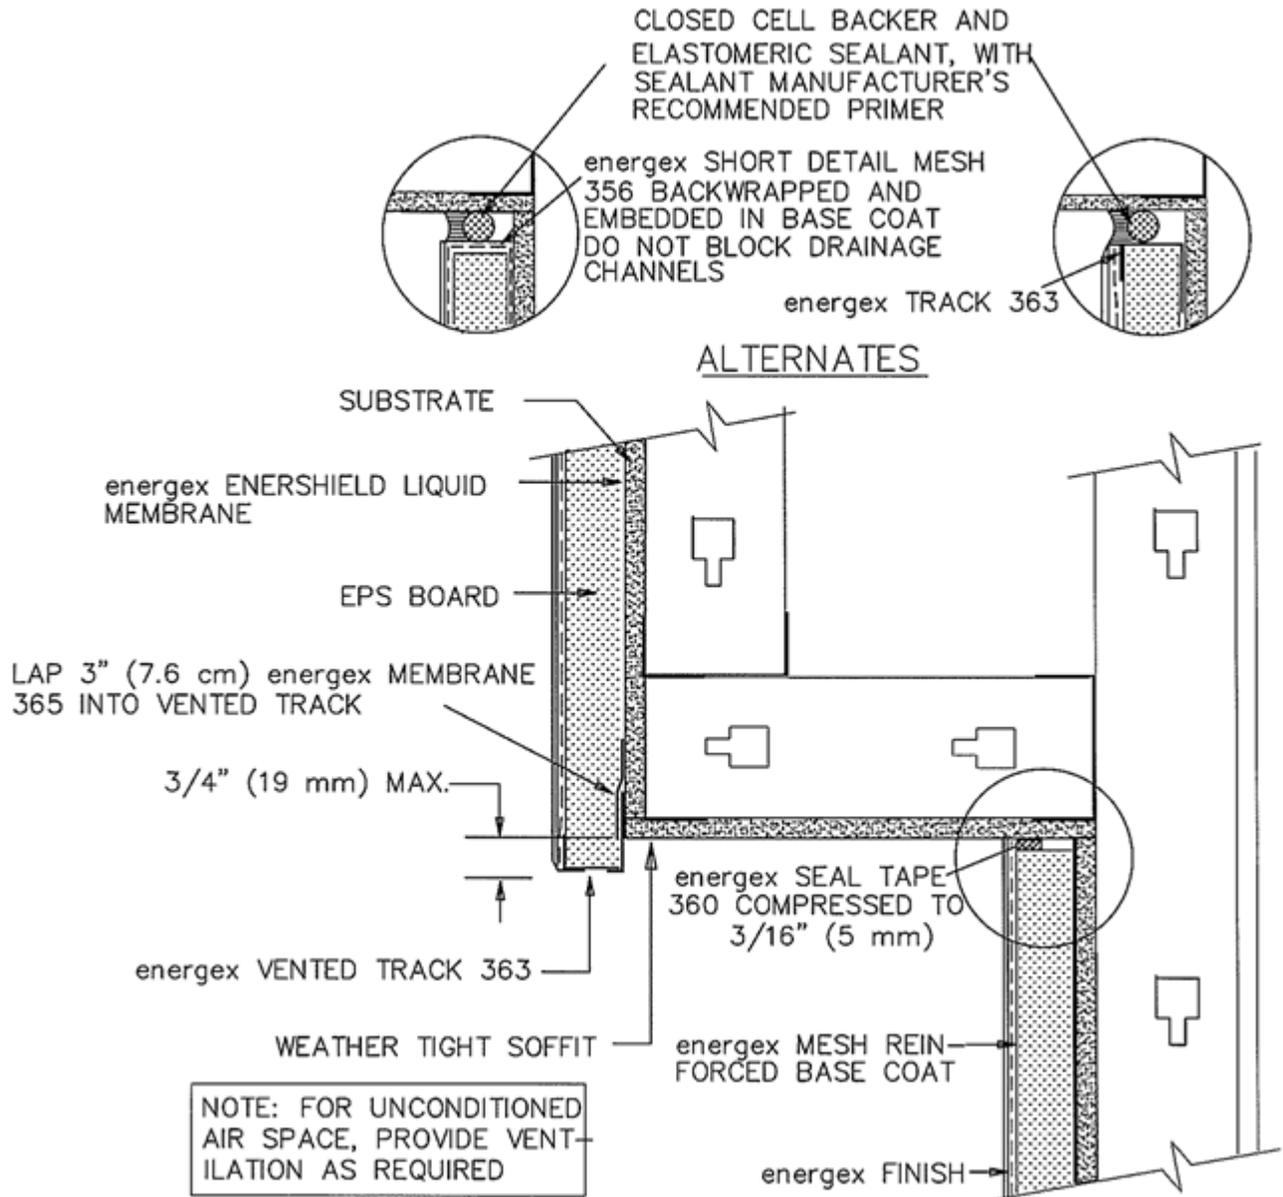


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION AT INSULATED SOFFIT

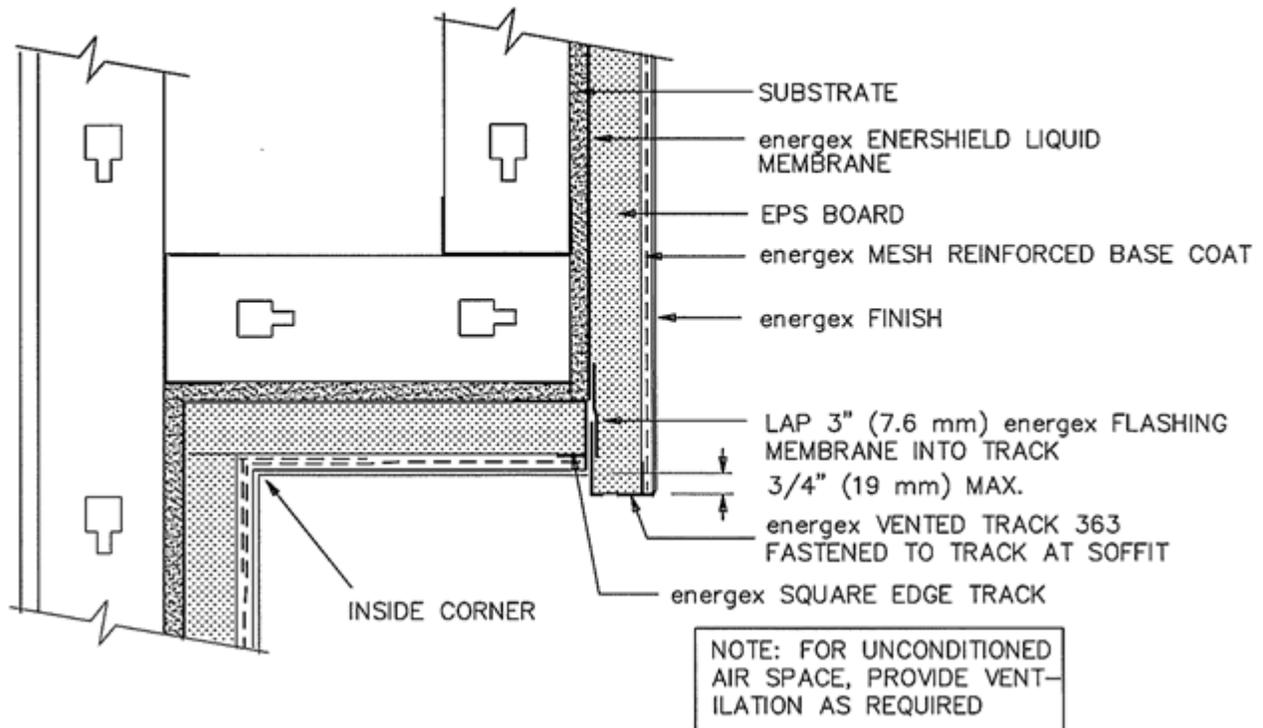


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

CORNICE MEETS SYSTEM WALL – PART A

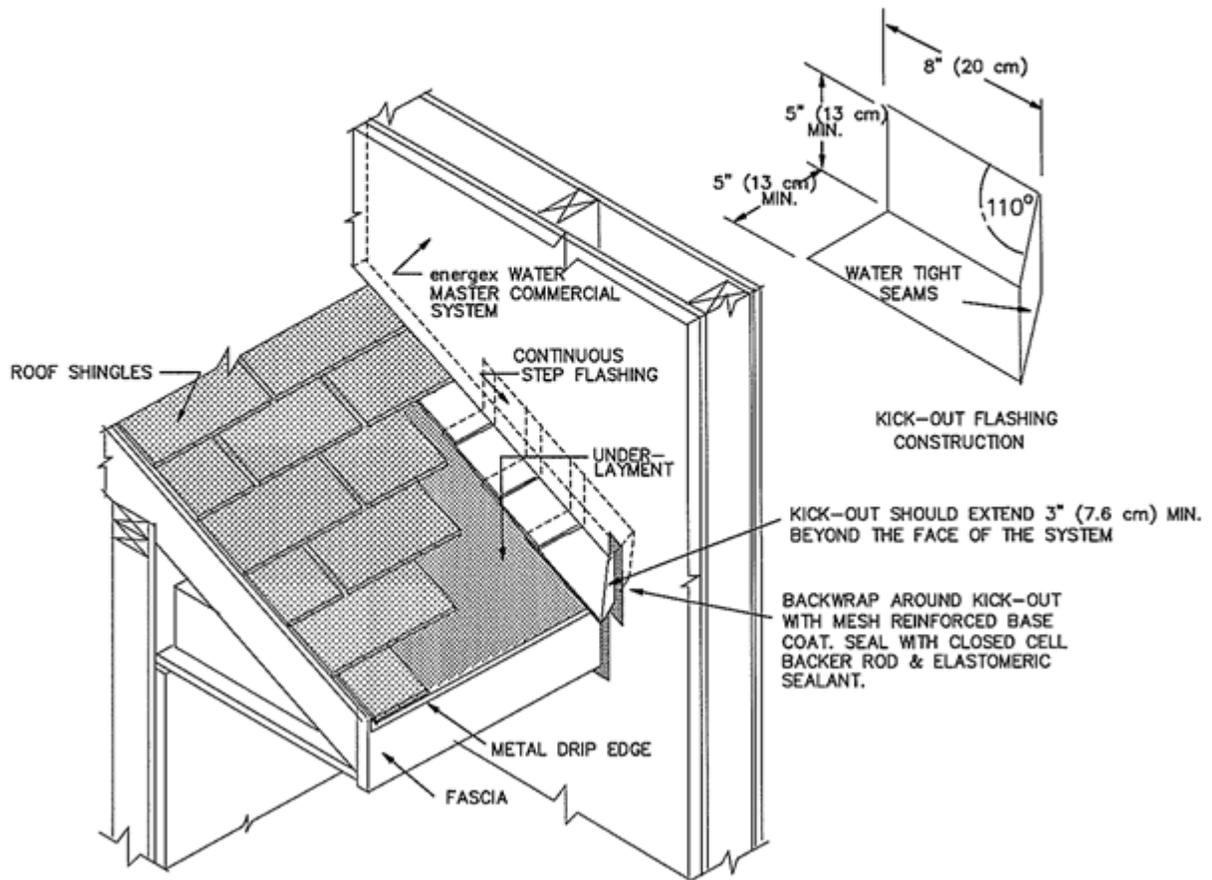


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

CORNICE MEETS SYSTEM WALL – PART B

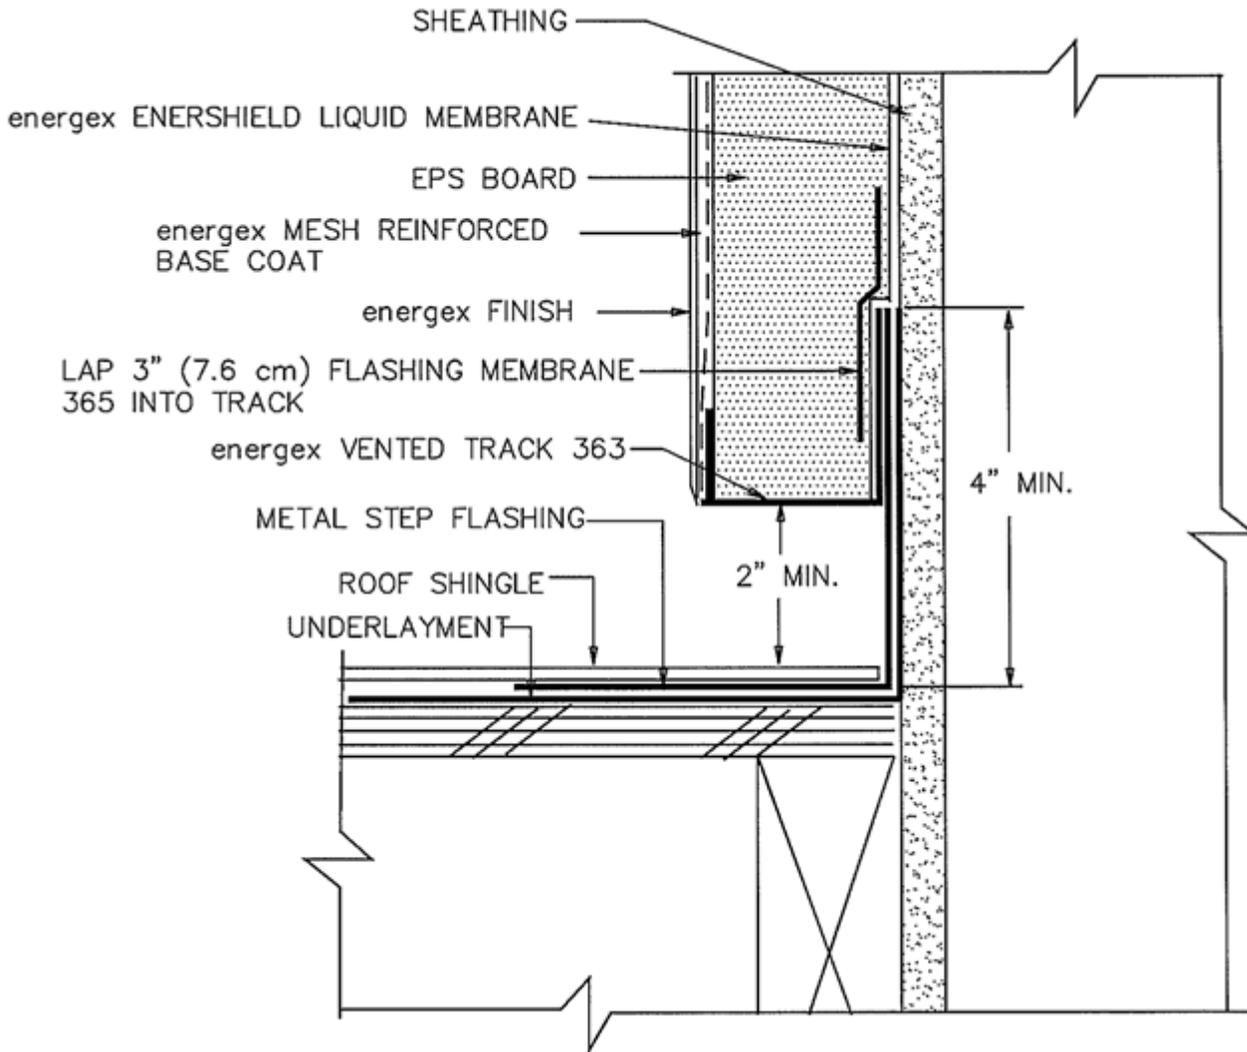


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

PARAPET

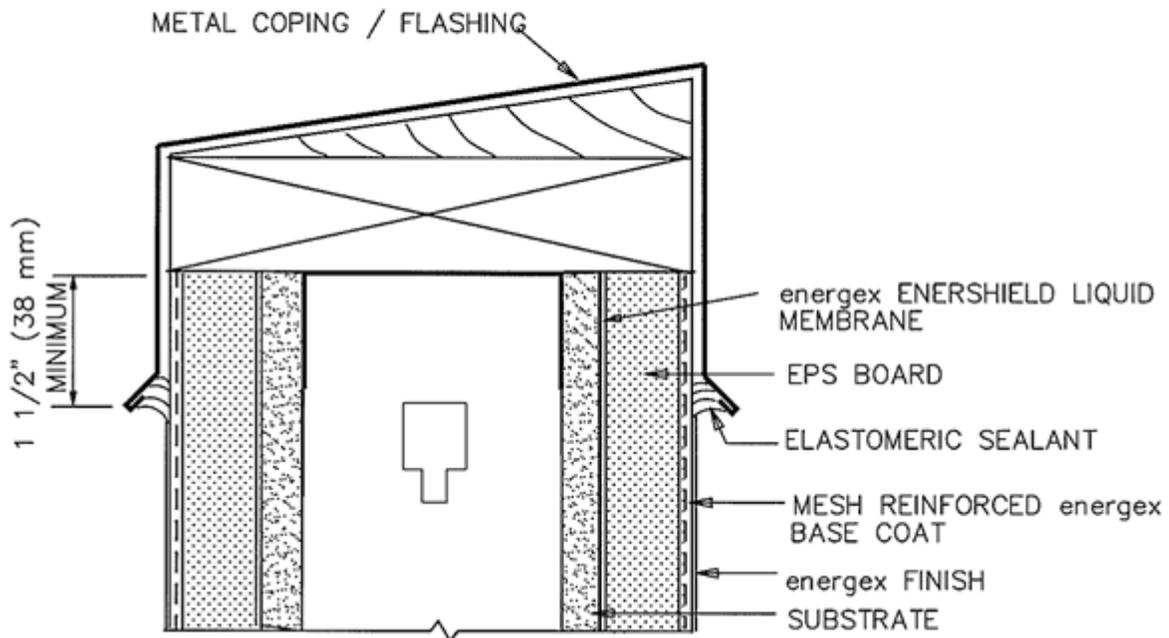


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

HI GH WALL AT LOW ROOF

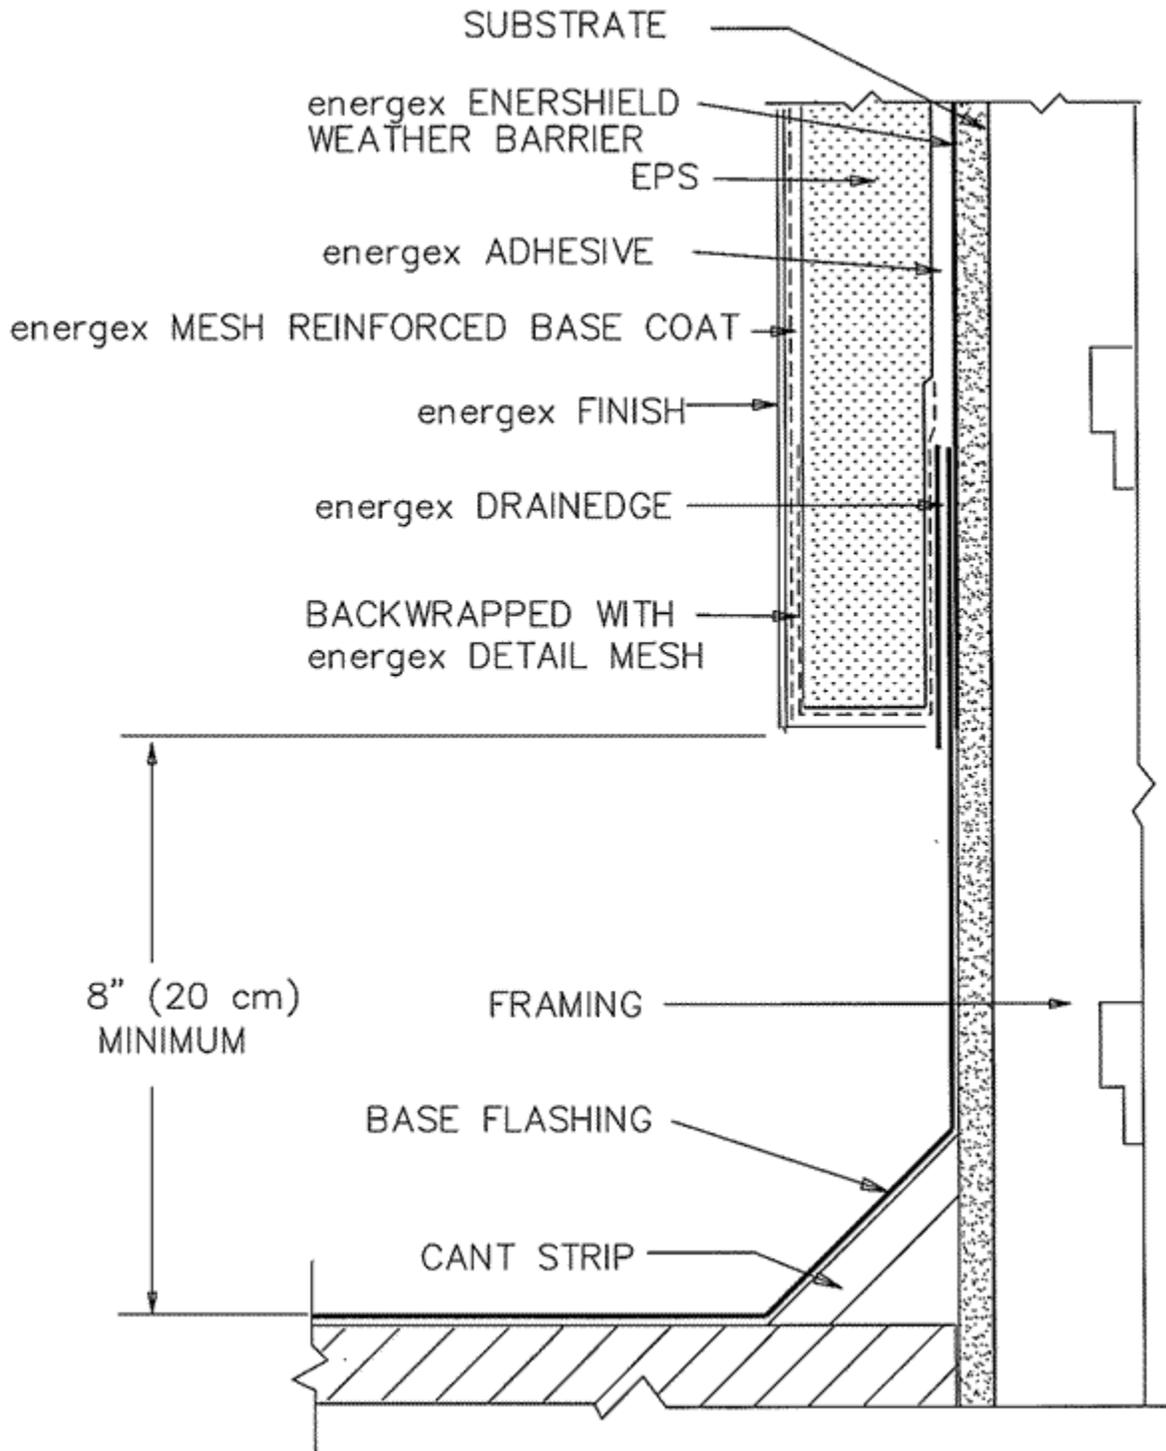


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

HOSE BIB

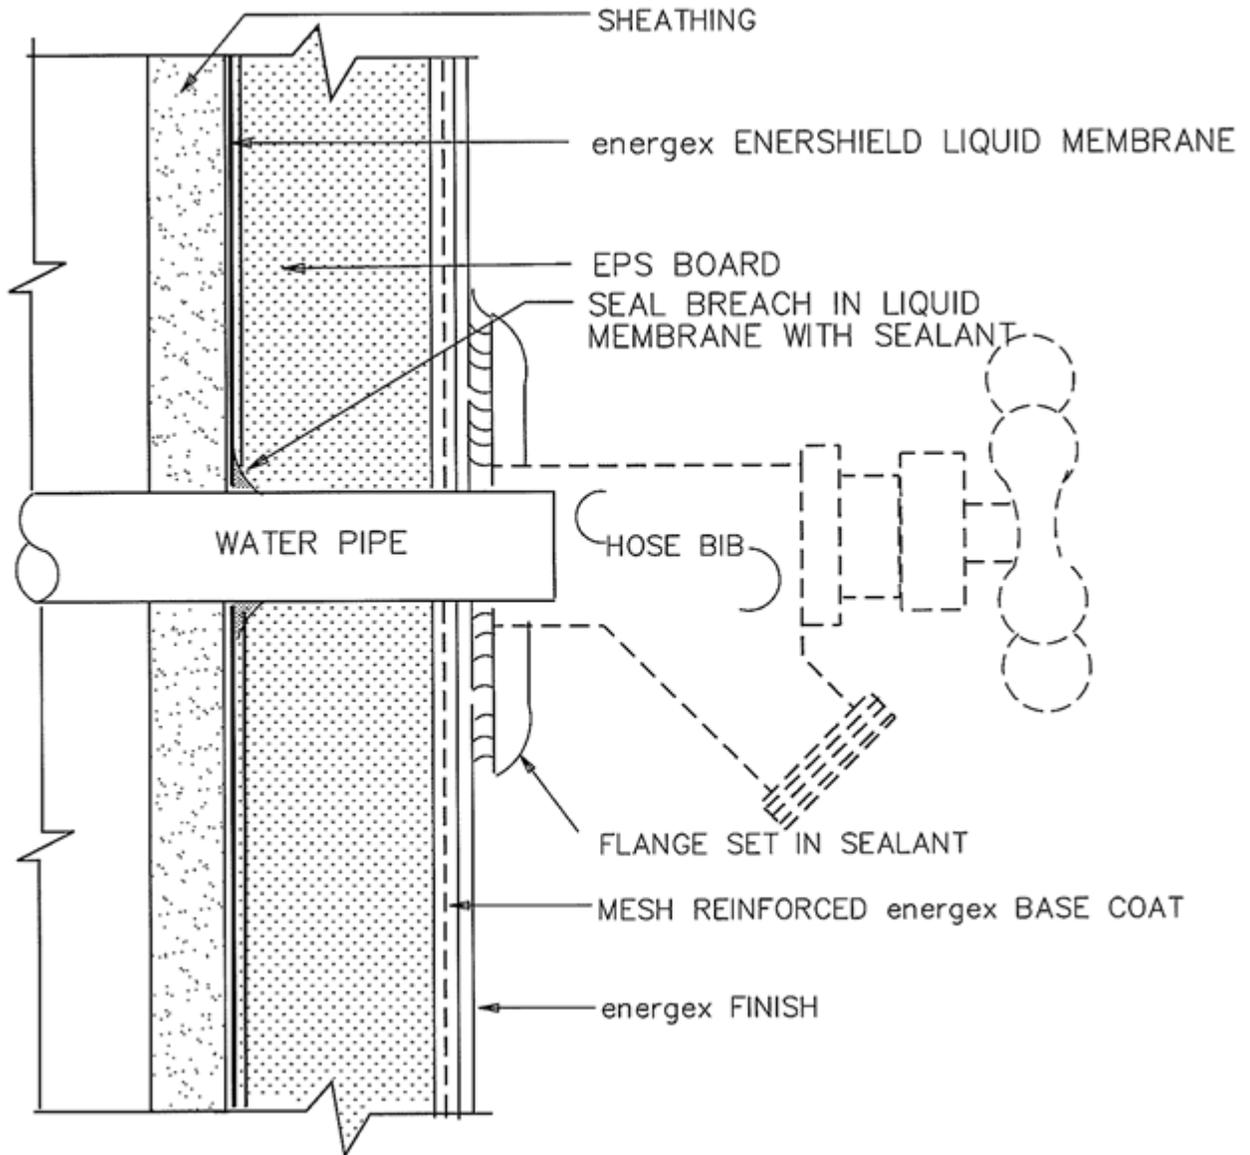


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

SMALL ELECTRICAL FIXTURE

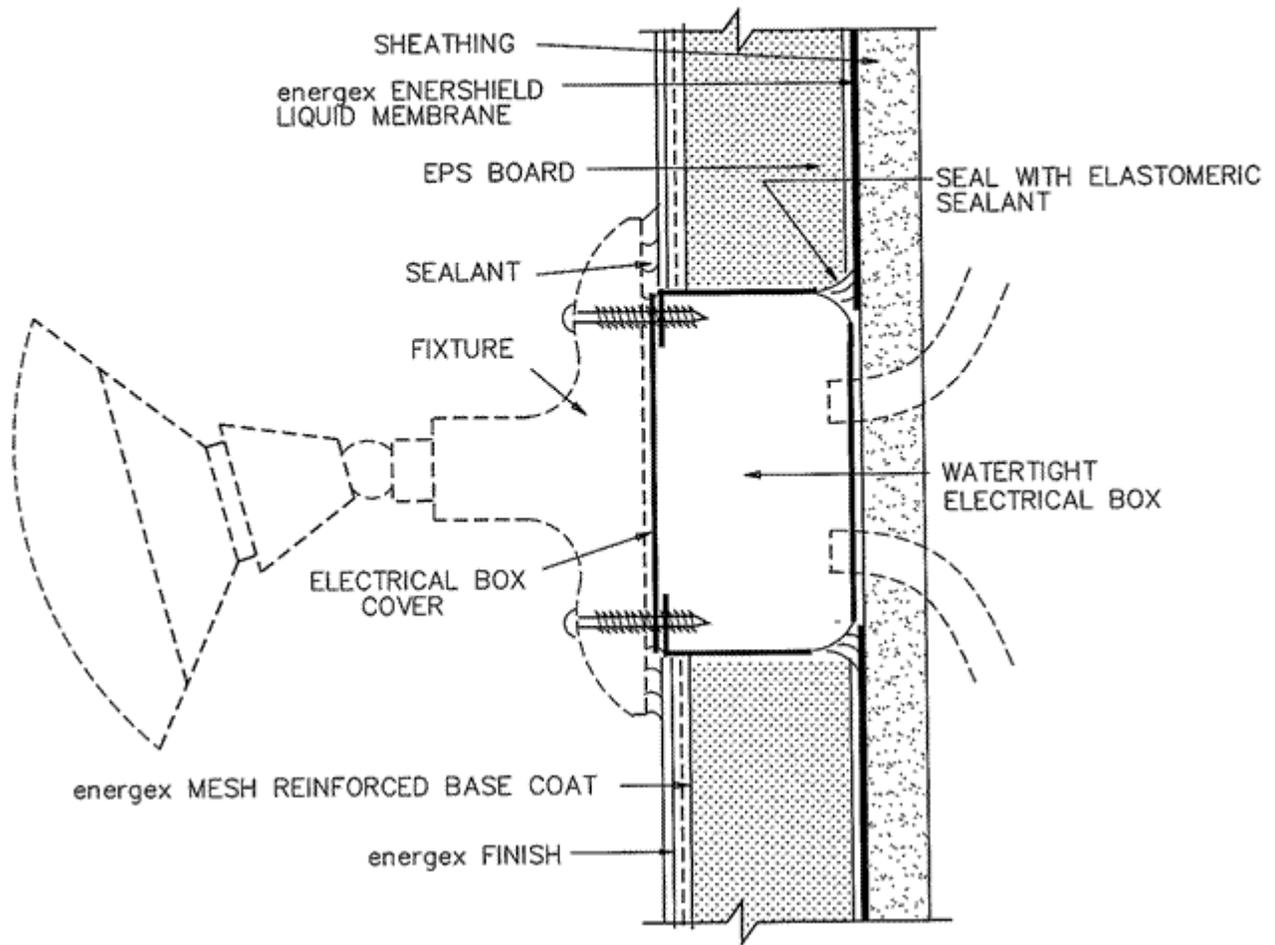


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

FIXTURE ATTACHMENT

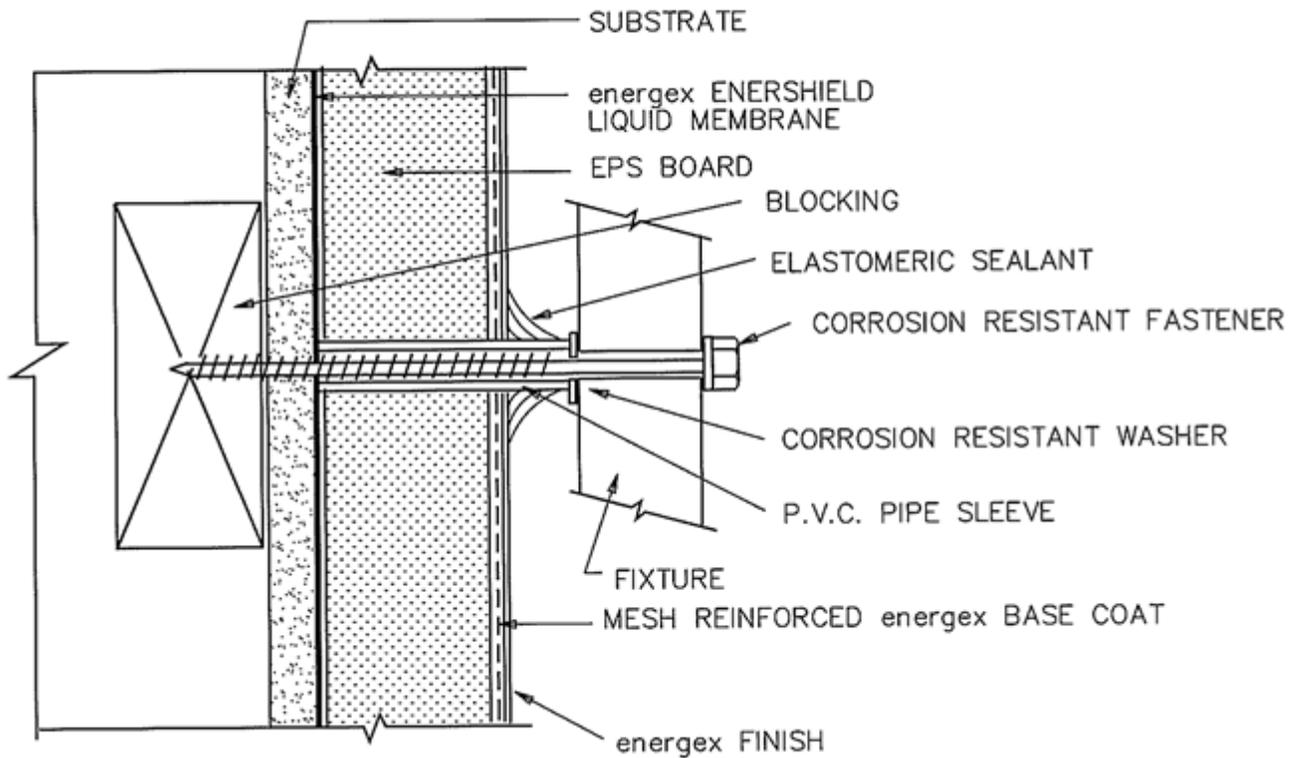


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

SCUPPER

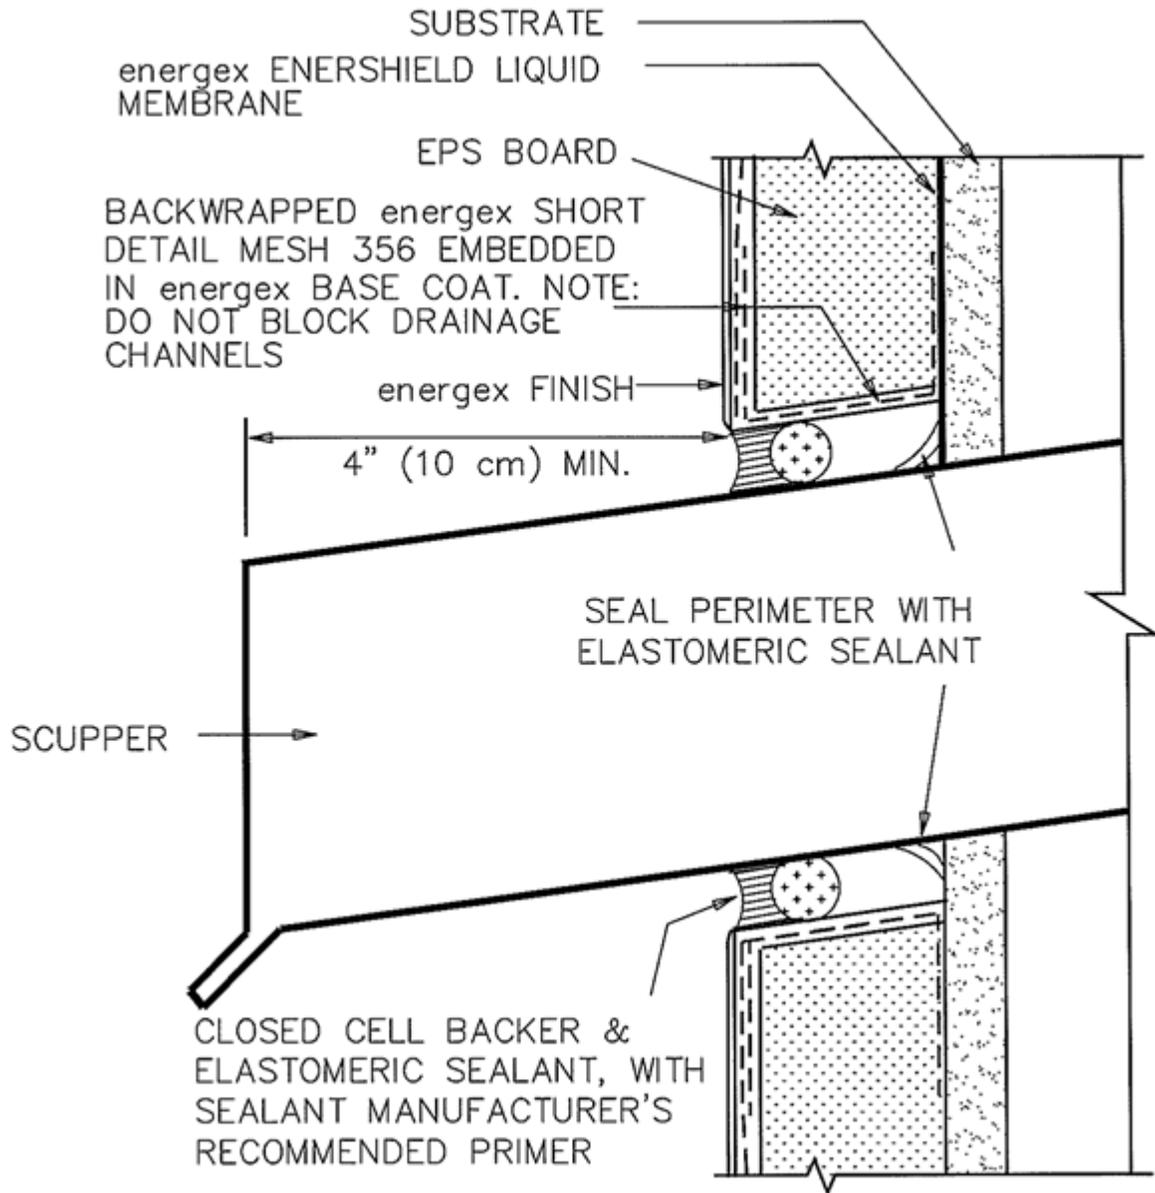


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

TERMINATION AT APPLIANCE

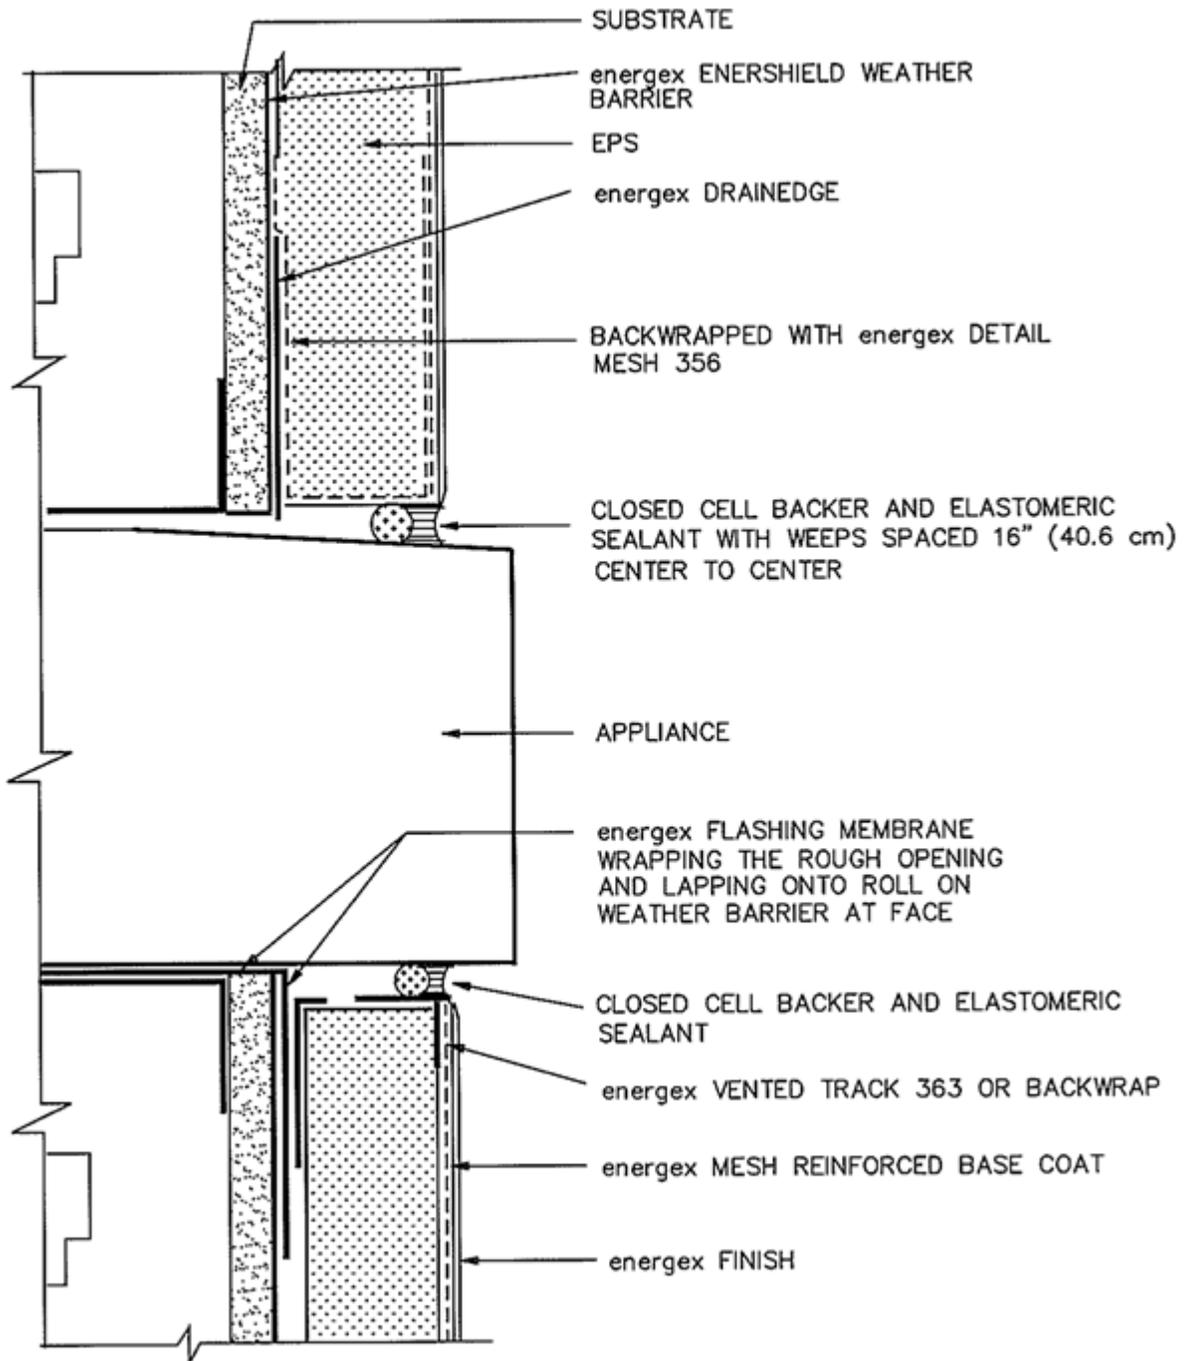


Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

GROOVE/REVEAL

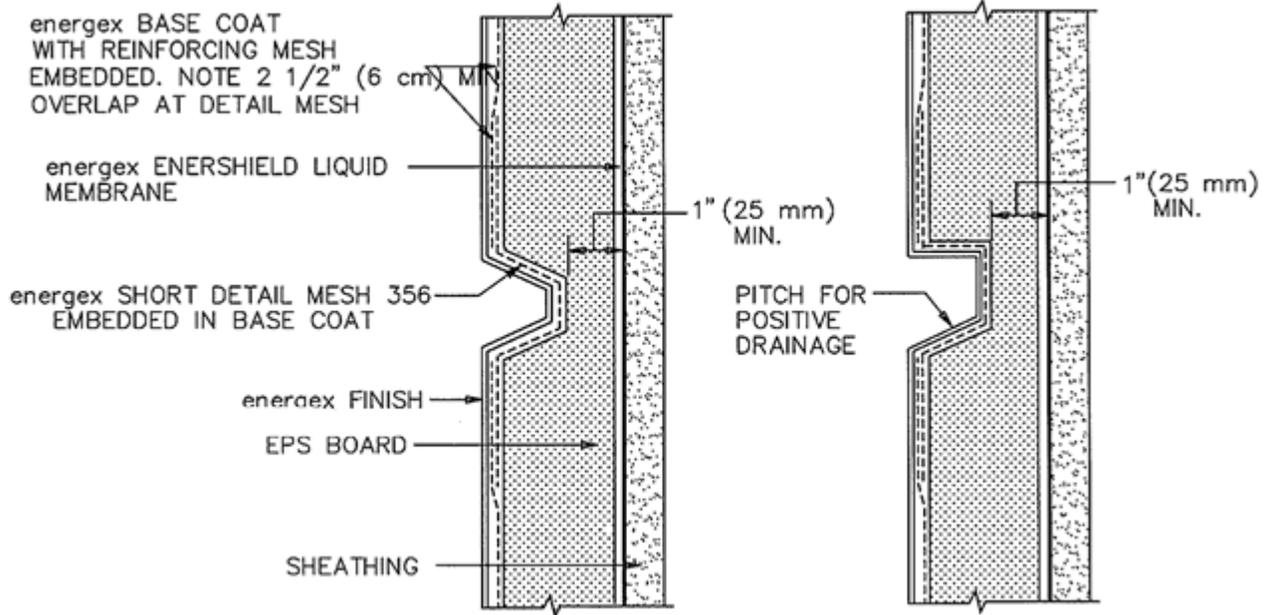

Details shown are *suggested* details and should be reviewed by design professionals for your specific application.

SMALL BAND/PROJECTION

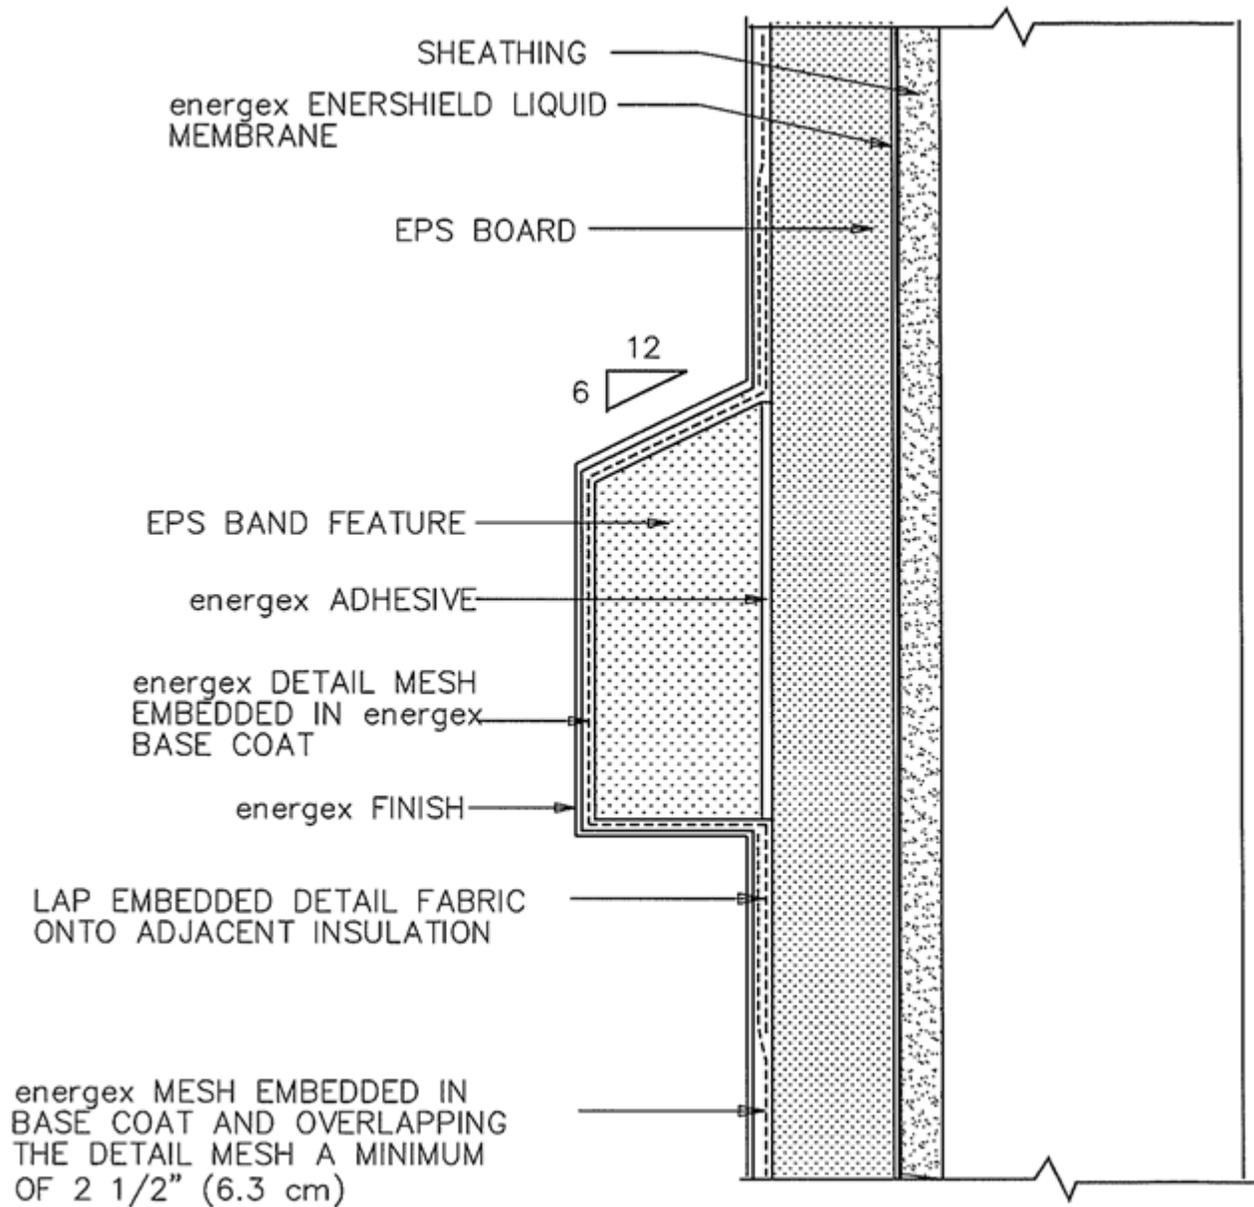

Details shown are *suggested* details and should be reviewed by design professionals for your specific application.